

# Distributed Strain and Temperature Sensor

# OZ Optics Limited

September 2025

# Table of Contents

- **Company Background**
- **Corporate Statements and Quality Policy**
- **Company Profile**
- **Core Competencies**
- **Leading Technology**
- **Industry Standards**
- **Marketing Strategy**
- **Operation Strategy**
- **OZ Optics Canada**
- **OZ Optics Türkiye**
- **OZ Optics China**

# Company Background



- **Founded in 1985**
- **Corporate headquarter located in Ottawa, Canada**
- **Manufacturing facility in Ottawa / Canada, Izmir / Turkiye and Jiaxing / China**
- **12 Product Groups:**
  - Laser-to-Fiber Delivery Systems
  - High Power Fiber Optic Components
  - Polarization Maintaining Products
  - Attenuators
  - Opto-Electronic Packaging
  - Fiber Optic Test Equipment
  - Fiber Optic Sensor Systems
  - Fiber Optics Components for Gyroscope
  - Fiber Optics Components for OCT
  - Fiber Optics Components for BioPhotonics
  - Fiber Optics Components for Quantum
  - Fiber Optics Components for AI Optical Connectivity
- **Sales offices in Canada, USA, Europe, Turkiye and China**

## ➤ Ottawa, Canada



## ➤ Izmir, Türkiye



## ➤ Jiaxing, China



# Corporate Statements and Quality Policy



## Our Vision

- ✓ Capture and expand market share
- ✓ Be the preferred supplier of choice
- ✓ Maximize shareholder value

## Our Mission

To become the leading provider of innovative optical products to telecom and non-telecom sectors

## Our Core Values

- ✓ Leadership
- ✓ Teamwork
- ✓ Boldness
- ✓ Commitments
- ✓ Innovation
- ✓ Rewards

## Our Quality Policy

Provide our Customers with a competitive advantage, leveraging performance, price and delivery, through a continuous process of Quality advancement in all areas of our Company.

Communicate effectively to our Customers, Suppliers and Shareholders our commitment to Quality, continuous improvement and to abide by any applicable requirements.

Promote opportunities of professional development for all members of our company through education, training and personal challenge.



# Company Profile

Over 489 employees worldwide

OZ Canada



**240+**  
Employees

OZ China





**120+**  
Employees

OZ Türkiye



**129+**  
Employees

# Company Profile

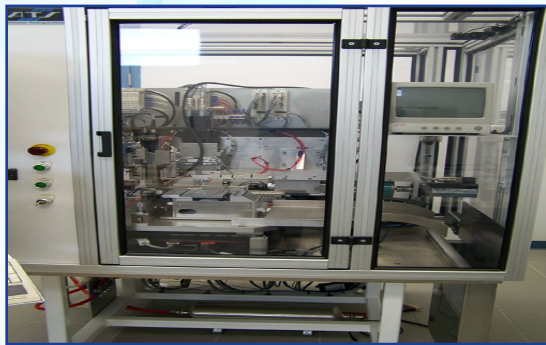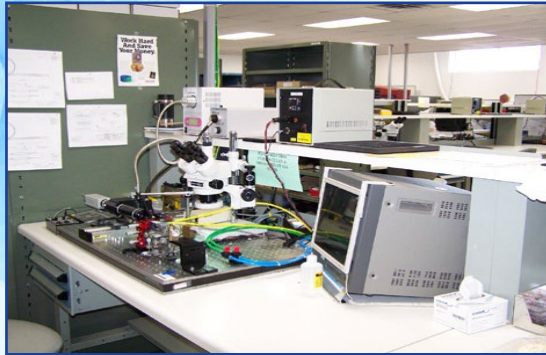

**Advanced Proprietary Processing Technology**



**Canada  
Certificate: FM 63463**



**China  
Certificate: FM 577647**



**Turkey  
Certificate: FM 601414**

**ISO9001:2015 Certified**




**Broad Patent Portfolio**



# Company Profile

## OZ Optics is Lead by an Experienced Team:

- **Ömür Sezerman, Chairman, President & CEO**
  - Founder and CEO since inception (40 years)
- **Zahide Sezerman, VP of Human Resources**
  - With OZ Optics since inception (40 years)
- **Garland Best, VP of Components Division**
  - 33 years at OZ Optics
- **Gordon Youle, VP of Test Equipment Division**
  - 26 years at OZ Optics
- **Saeed Pilevar, Senior VP of Business Development**
  - 1 year at OZ Optics
- **Onur Koca, General Manager of OZ Türkiye**
  - 3 year at OZ Optics
- **Bing Li, General Manager of OZ Optics China**
  - 21 years at OZ Optics

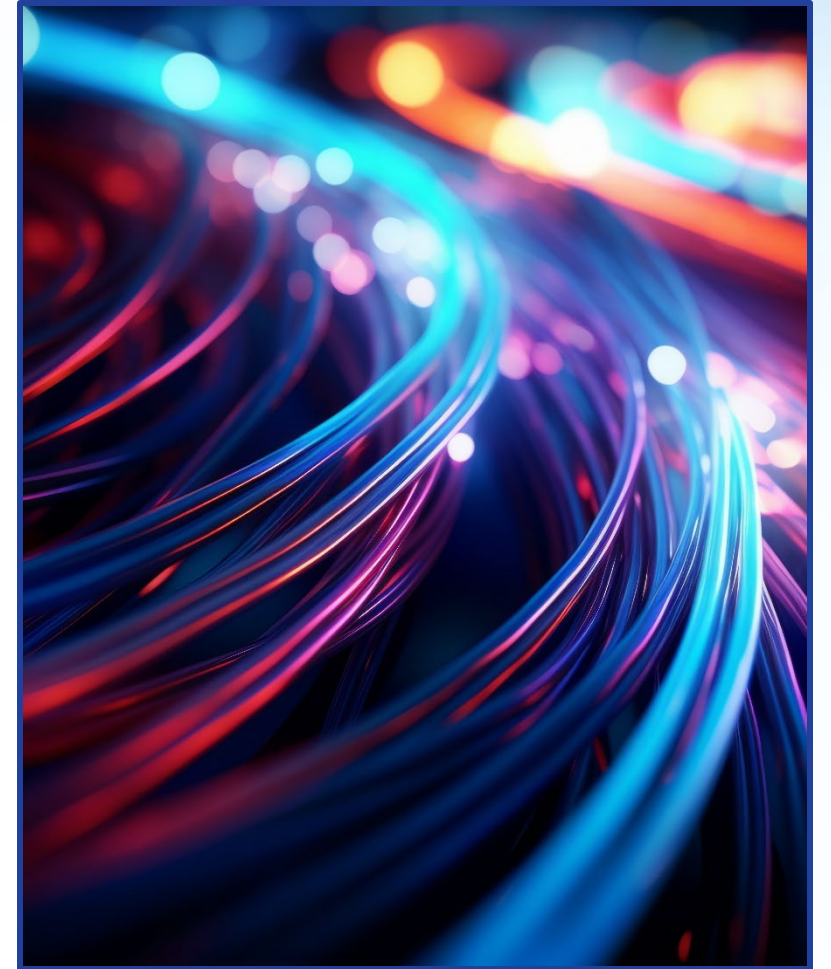


# Company Profile

Experienced and Well-Trained Staff in Following Fields:  
Optical, Mechanical, Electronics & Software

➤ CNC Machine Shop




➤ Femto-Second Laser Lab

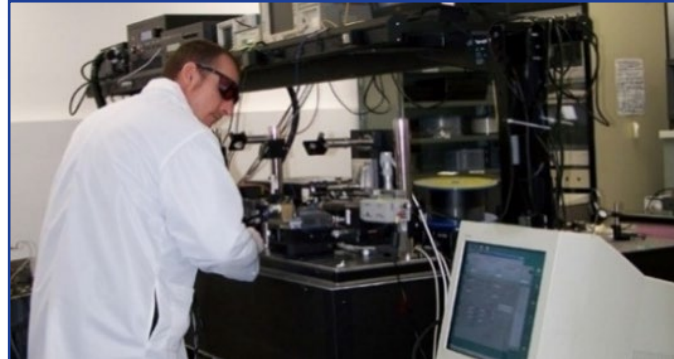


➤ AR Coating



➤ Clean Room

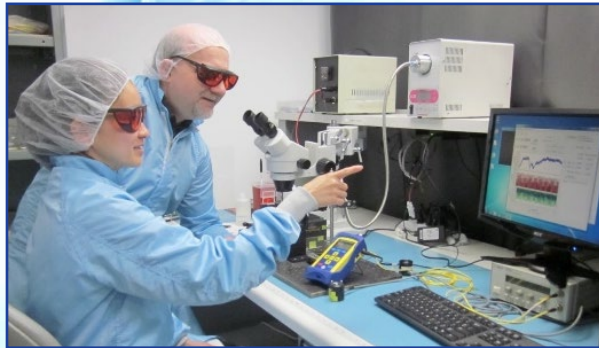

➤ Laser Conditioning/Cleaving

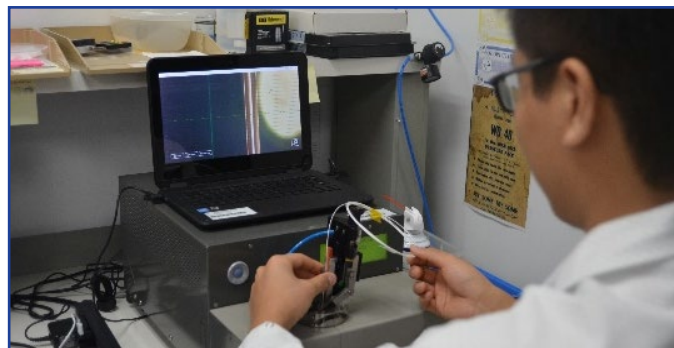



# Core Competencies




- **Pioneer in Polarization Maintaining (PM) Components & Custom Test Equipment, Including Polarization Test Equipment and FTTH Equipment**
- **Leader in Wavelength Flattened, High Power & Low PDL Components**
- **Leader in High Power Fiber Optic Delivery Systems**
- **Widest Range in Attenuator Product Offering**
- **Fiber Optic Distributed Strain and Temperature Sensors**
- **Complete product line for AI Optical Connectivity, OCT, Gyroscope & BioPhotonics applications & 2 Micron**
- **Now available: Spectrometers and Quantum Light Sources**



# Leading Technology



➤ **Three Product Groups** ➤ **Over 1,000 Products** ➤ **Leading Edge R&D**

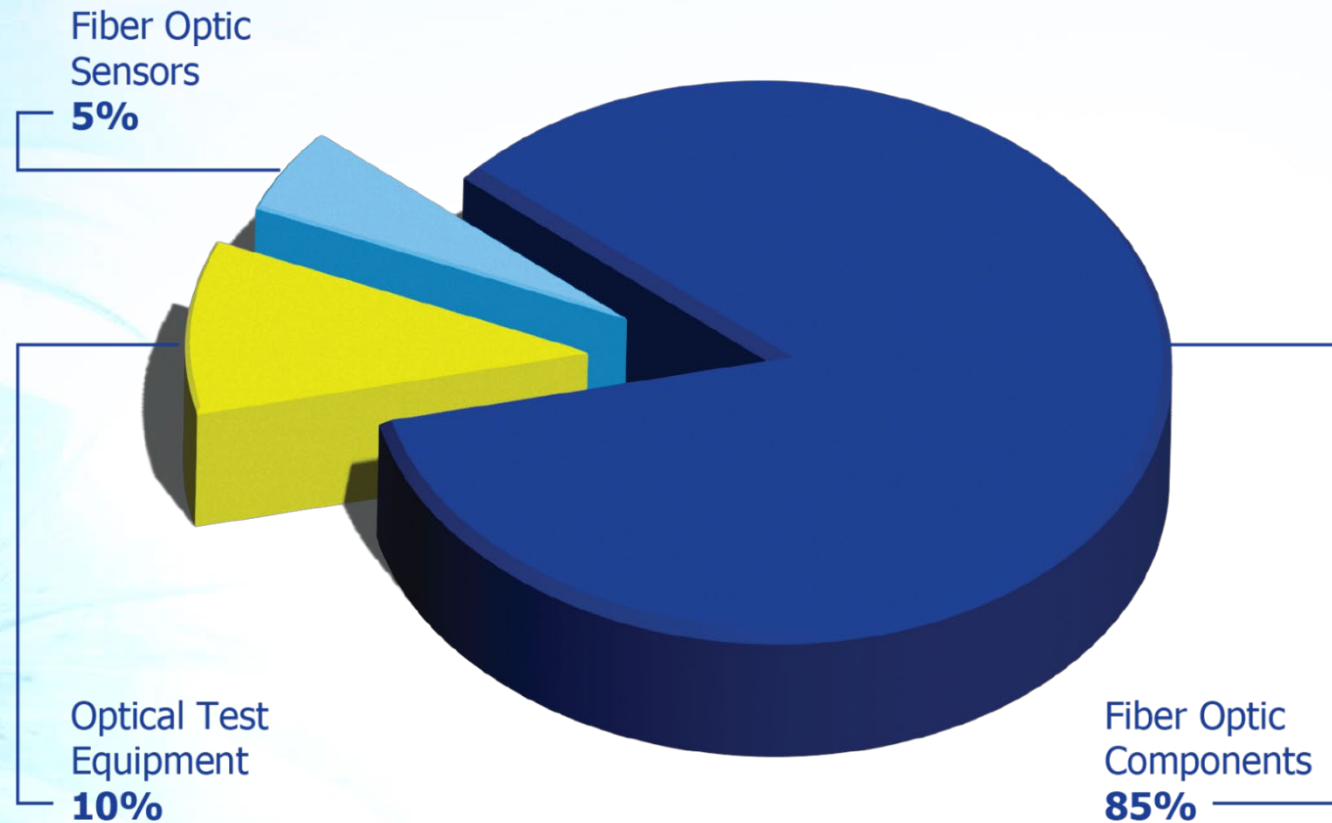



# Leading Technology

## Featured Products

### World's Largest Online Fiber Optic Catalog

Most Products are in Stock

Quantum Light Sources

Fiber Optic Products for Biophotonics Applications

Fiber Optic Products for Gyroscopes

Polarization Maintaining Components

Delivery Systems

High Power Components

Test Equipment

High and Low Power Patchcords

### Polarization Maintaining Fiber Optic Components

Patent Numbers: USA 7058275, 7095931, 7295731, China 1672073

Polarization Maintaining Connectors and Patchcords

Polarization Maintaining and Polarizing Splitters / Combiners / Fused Couplers / Switches

All Fiber Manual and Electrically Driven Polarization Controllers / Seramblers

Polarization Dependent Loss Emulators

Fiber Pigtailed Polarizers

PM Fiber Directional Taps and PLC Splitters

Isolators

PM Fiber Pigtailed Circulators

### Laser and Laser Diode to Fiber Delivery Systems

Laser to Fiber Couplers

Pigtail, Receptacle Style Collimators and Focusers

Bulkhead Receptacles

Bare Fiber Adaptors with Magnetic Clips

Wavelength Division Multiplexers(WDMs) and R&B Combiners

OCT Modules and 2 micron Components

Evanesence Based Variable Split Ratio Fiber Splitter/Coupler

OEM Laser Diode to Fiber Couplers

### High Power Fiber Optic Components

Patent Numbers: Canada 2494133, USA 7058275, 7095931, 7295731, China 1672073

High Power, High Temperature Connectors and Patchcords

OZPEN™ CO-2 Fiber Optics Cleaning Unit for High Power Components

High Power Laser to Fiber Couplers, Collimators and Focusers

High Power Mode Field Adaptors

High Power Optical Taps and Power Monitors

High Power Isolators

High Power Splitters and Wavelength Division Multiplexers (WDMs)

Shutters, Receptacles and Sleeve Thru Adaptors with Sensors



# Leading Technology

## Featured Products



### Fiber Optic Attenuators

Polarization Maintaining, Single Mode and Multi-Mode Fibers



Benchtop Digital



Variable Attenuators



Digital Variable Attenuators




Electrically Controlled Variable Attenuators




MEMS Variable Attenuators




PM, SM and MM Fibers Pigtailed Inline Variable Attenuators



Single and Multi Channel Miniature Variable Attenuators



Reflective Style Variable Attenuators



Air Gap Variable Attenuators



Plug Type Fixed Attenuators




Attenuating Fiber Patchcords

### Fiber Optic Components for Optoelectronic Packaging


Hermetically Sealable Patchcords with Glass or Metal Solder




Single Channel



Multi Channel



Metalized Fibers



PM, SM and MM Fiber Pigtailed V-Groove Arrays



Polarization Measurement System for V-Grooves



Tapered, Lensed Fiber, Polished and Laser Shaped



Precision Collimator and Focuser Array



Fused Fiber Collimator

### Fiber Optic Test Equipment



Quantum Entangled Photons Sources



High-Resolution Optical Spectrometers



Optical Fiber Length Meters



Rock Reflection Meters



High-Speed Polarization Controller-Scrambler



Handheld and Benchtop Extinction Ratio Measurement Systems



Multichannel, Benchtop and Handheld Digital Variable Attenuators



High Power Visual Fault Locators



Powermeters with Smart Detector Heads




Laser Diode Stable Sources

### Fiber Optic Components for 2 Micron Wavelengths



Fiber Optic Patchcords



Fused Couplers, Taps, Beam Splitters and Combiners




Fiber Pigtailed Laser Diode Sources



Pigtailed, Receptacle Style Collimators and Focusers



High Speed Electro-Optic Polarization Controllers and Scramblers



Manual and Electrically Controlled Variable Attenuators



Polarizers



Isolators



# Leading Technology


## Featured Products



### New Fiber Optic Products



Polarization Entangled Photon Sources



High-Resolution Optical Spectrometers



High Speed Electro-Optic Polarization Controllers and Scramblers



Polarization Entanglement Tomography Analyzers



Fiber Optic Coils For Gyroscopes



Universal Optical DNA Band Detection Systems for Pathogens



Motor Driven Polarization Dependent Loss Emulators



Detector Heads and Optical Power Monitors




### Fiber Optic Products for Gyroscopes




Fiber Optic Coils for Gyroscopes



ASE Sources



Wavelength Division Multiplexers



PM, SM and MM Fiber Pigtailed V-Groove Arrays



Fused Couplers, Taps, Beam Splitters and Combiners



Fiber Optic Polarizers



Fiber Optic Patchcords



SM and PM Fiber Pigtailed Circulators



Isolators

### Quantum Entangled Photons Sources



Hyper-Entangled Photon Source Broadband Telecom



Polarization-Entangled Photon Source Broadband Telecom



Bright Polarization-Entangled Photon Source Broadband Telecom



Bright Polarization-Entangled Photon Source Narrowband Telecom



Correlated Photon Pair Sources



Polarization-Entangled Photon Source Narrowband at 610 nm



Polarization Entanglement Tomography Analyzer

### Fiber Optic Products for OCT Applications




OCT Modules



Manual and Electrically Controlled Broadband Variable Attenuators



Manual and Electrically Controlled Fiber Optic Delay Lines




Manual and Electrically Controlled Polarization Controllers / Scramblers



Fiber Pigtailed Broadband SLED Sources




Fiber Collimators / Focusers



Broadband Fused Couplers



SM and PM Fiber Pigtailed Circulators



Polarization Entanglement Tomography Analyzer



# Leading Technology

## Featured Products

### Fiber Optic Products for AI Optical Connectivity


- 20 Fiber Matrix Array (20 FMA) Assemblies
- 12 and 16 channels MPD/MTP® Polarization Maintaining Fiber Assemblies
- U-Group Assemblies
- High Power Optical Taps and Power Monitors
- All Fiber Manual and Electrically Driven Polarization Controllers / Scramblers
- Tapered / Lensed Fiber Polished / Laser Shaped
- Fiber Pigtailed Polarizers
- Isolators
- Pigtail, Receptacle Style Collimators and Focusers

### Fiber Optic Products for Biophotonics Applications

- Universal Optical DNA Rapid Detection Systems for Pathogens
- High-Resolution Optical Spectrometers
- Fiber to Photodiode Couplers with Removable Filters
- High and Low Power Patchcords
- High Power Laser to Fiber Couplers
- Pigtail, Receptacle Style Collimators and Focusers
- Fiber Optic U-Bracket Assemblies
- Wavelength Division Multiplexers and Beam Splitters
- Turnkey, Ultra Stable Laser Modules
- Pocket Optical Power Meter and Detectors

### Universal Optical DNA Rapid Detection System


For Pathogens Including:  
COVID-19, SARS, EBOLA, CHOLERA, SALMONELLA, ETC.

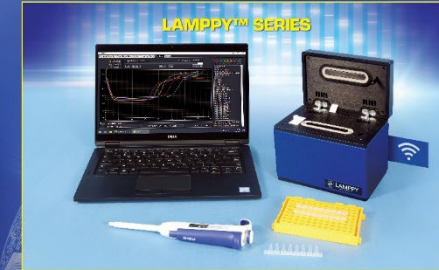

#### Features:

- Use to detect viral, fungal, and bacterial DNA/RNA
- Rapid DNA/RNA detection (as little as 20 minutes)
- Highly sensitive and specific detection of low viral levels
- Intuitive software displays real time data during testing
- Melt analysis available with the included software
- Lid heater prevents evaporation and condensation
- Compact modular design allows for easy cleaning and maintenance
- Pair with an external battery for a portable and field-deployable system
- Test up to 8 samples simultaneously (higher throughput systems with up to 96 samples available upon request)
- Wireless communication with dual-band Wi-Fi and Bluetooth connectivity
- A fraction of the cost of qPCR based systems
- OZ Optics also offers private labelling for volume OEM applications

Clinical trial: LAMPY™ vs. Leading brand qPCR machine



In a lab study done at Acibadem University using saliva samples taken from patients at the Acibadem Hospitals, LAMPY™ was compared to a well-known conventional qPCR machine in performance and speed. The comparison study was carried out with a sample size of 262 using the COVID LAMP-based kit on both instruments and then verified with the KrosQuant SARS-COV-2 (2019 nCoV) Real Time PCR Diagnostic Kit on a leading brand conventional qPCR machine.




# Leading Technology Featured Products



## Fiber Optic Distributed Strain and Temperature Sensors

USA Patent Numbers: 7499151, 7599047, and 9568307

- BOTDA only, BOTDR only, or both BOTDA and BOTDR modules in one unit
- Simultaneous measurement of strain and temperature
- Fast, dynamic measurement of strain and/or temperature up to 200 km sensing range
- Uses standard telecommunications fibers to minimize costs

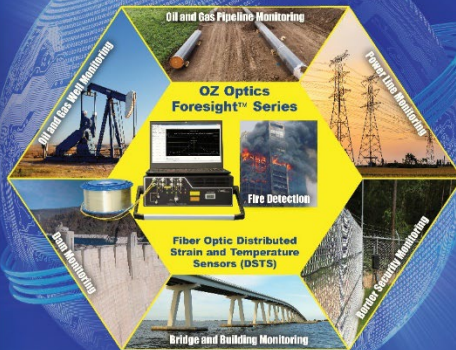

## Fiber Optic Sensors for Pipeline Monitoring

USA Patent Numbers: 7499151, 7599047, and 9568307

- Pipeline leakage detection
- Sensitive detection of corrosion / erosion, cracks and buckling
- BOTDA only, BOTDR only, or both BOTDA and BOTDR modules in one unit
- Simultaneous measurement of strain and temperature
- Fast, dynamic measurement of strain and/or temperature up to 200 km sensing range
- Uses standard telecommunication fiber to minimize costs



Pipeline Monitoring



Corrosion and Erosion Monitoring



Fire Detection

## Fiber Optic Sensors for Fire Detection

USA Patent Numbers: 7499151, 7599047, and 9568307

- BOTDA only, BOTDR only, or both BOTDA and BOTDR modules in one unit
- Simultaneous measurement of strain and temperature
- Fast, dynamic measurement of strain and/or temperature up to 200 km sensing range
- Uses standard telecommunications fiber to minimize costs





# Leading Technology

## Featured Products




### Fiber Optic Sensors for Bridges, Dams and Buildings

USA Patent Numbers: 7499151, 7599047, and 9568307

- BOTDA only, BOTDR only, or both BOTDA and BOTDR modules in one unit
- Fast, dynamic measurement of strain and/or temperature up to 200 km sensing range
- Simultaneous measurement of strain and temperature
- Uses standard telecommunication fibers to minimize costs



Bridge Monitoring

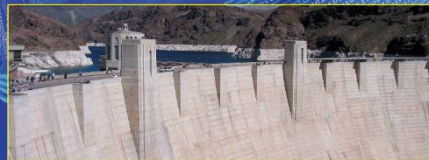

Dam Monitoring



Building Fire Detection

### Fiber Optic Sensors for Power Line and Smart Power Generator Monitoring

USA Patent Numbers: 7499151, 7599047, and 9568307

- BOTDA only, BOTDR only, or both BOTDA and BOTDR modules in one unit
- Fast, dynamic measurement of strain and/or temperature up to 200 km sensing range
- Simultaneous measurement of strain and temperature
- Uses standard telecommunication fiber to minimize costs



Underground Power Line Monitoring



Power Line Monitoring



Optical Ground Wire (OPGW)



Construction of OPGW



Gas Generator Monitoring


### Fiber Optic Sensors for Security Monitoring

USA Patent Numbers: 7499151, 7599047, and 9568307

- BOTDA only, BOTDR only, or both BOTDA and BOTDR modules in one unit
- Fast, dynamic measurement of strain and/or temperature up to 200 km sensing range
- Simultaneous measurement of strain and temperature
- Uses standard telecommunication fiber to minimize costs



Border Security Monitoring

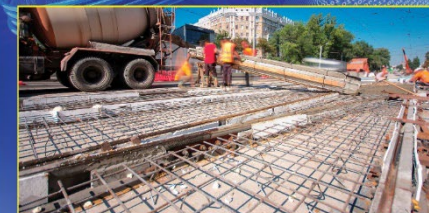

Highway Health Monitoring



# Industry Standards

**All Products Manufactured are in Strict Accordance with International Industry Standards:**

- **ISO 9001:2015 Certified (Canada, China and Türkiye)**
- **REACH Compliance**
- **RoHS Compliance**
- **CE Compliance**
- **Telecordia Compliance**
- **Controlled Goods Directorate Registered**
- **Critical supplier for F35 and F18 Project**
- **TSCA (Toxic Substance Control Act) Compliance**
- **CHEMSHERPA Compliance**
- **IEC 61010 Compliance**



# Marketing Strategy

## Application Market

Using our strong direct sales and distributors, we address the following markets:

- **Energy – Oil and Gas**
- **Military and Homeland Security**
- **Educational**
- **Industrial**
- **Telecom / Datacom**
- **Medical & Pharmaceutical**





# Marketing Strategy

## Global Sales Network



OZ Optics has resellers and distributors in over 30 Countries and Regions with over 10,000 customers worldwide:



Austria



Germany



Luxembourg



Sweden



Belgium



Greece



Netherlands



Switzerland



Brazil



Hong Kong



Norway



Taiwan



Canada



India



Poland



Thailand



China



Ireland



Portugal



Türkiye



Denmark



Italy




Singapore



United Kingdom



France



Japan



South Korea




United States



# Operation Strategy

## Manufacturing Strategy

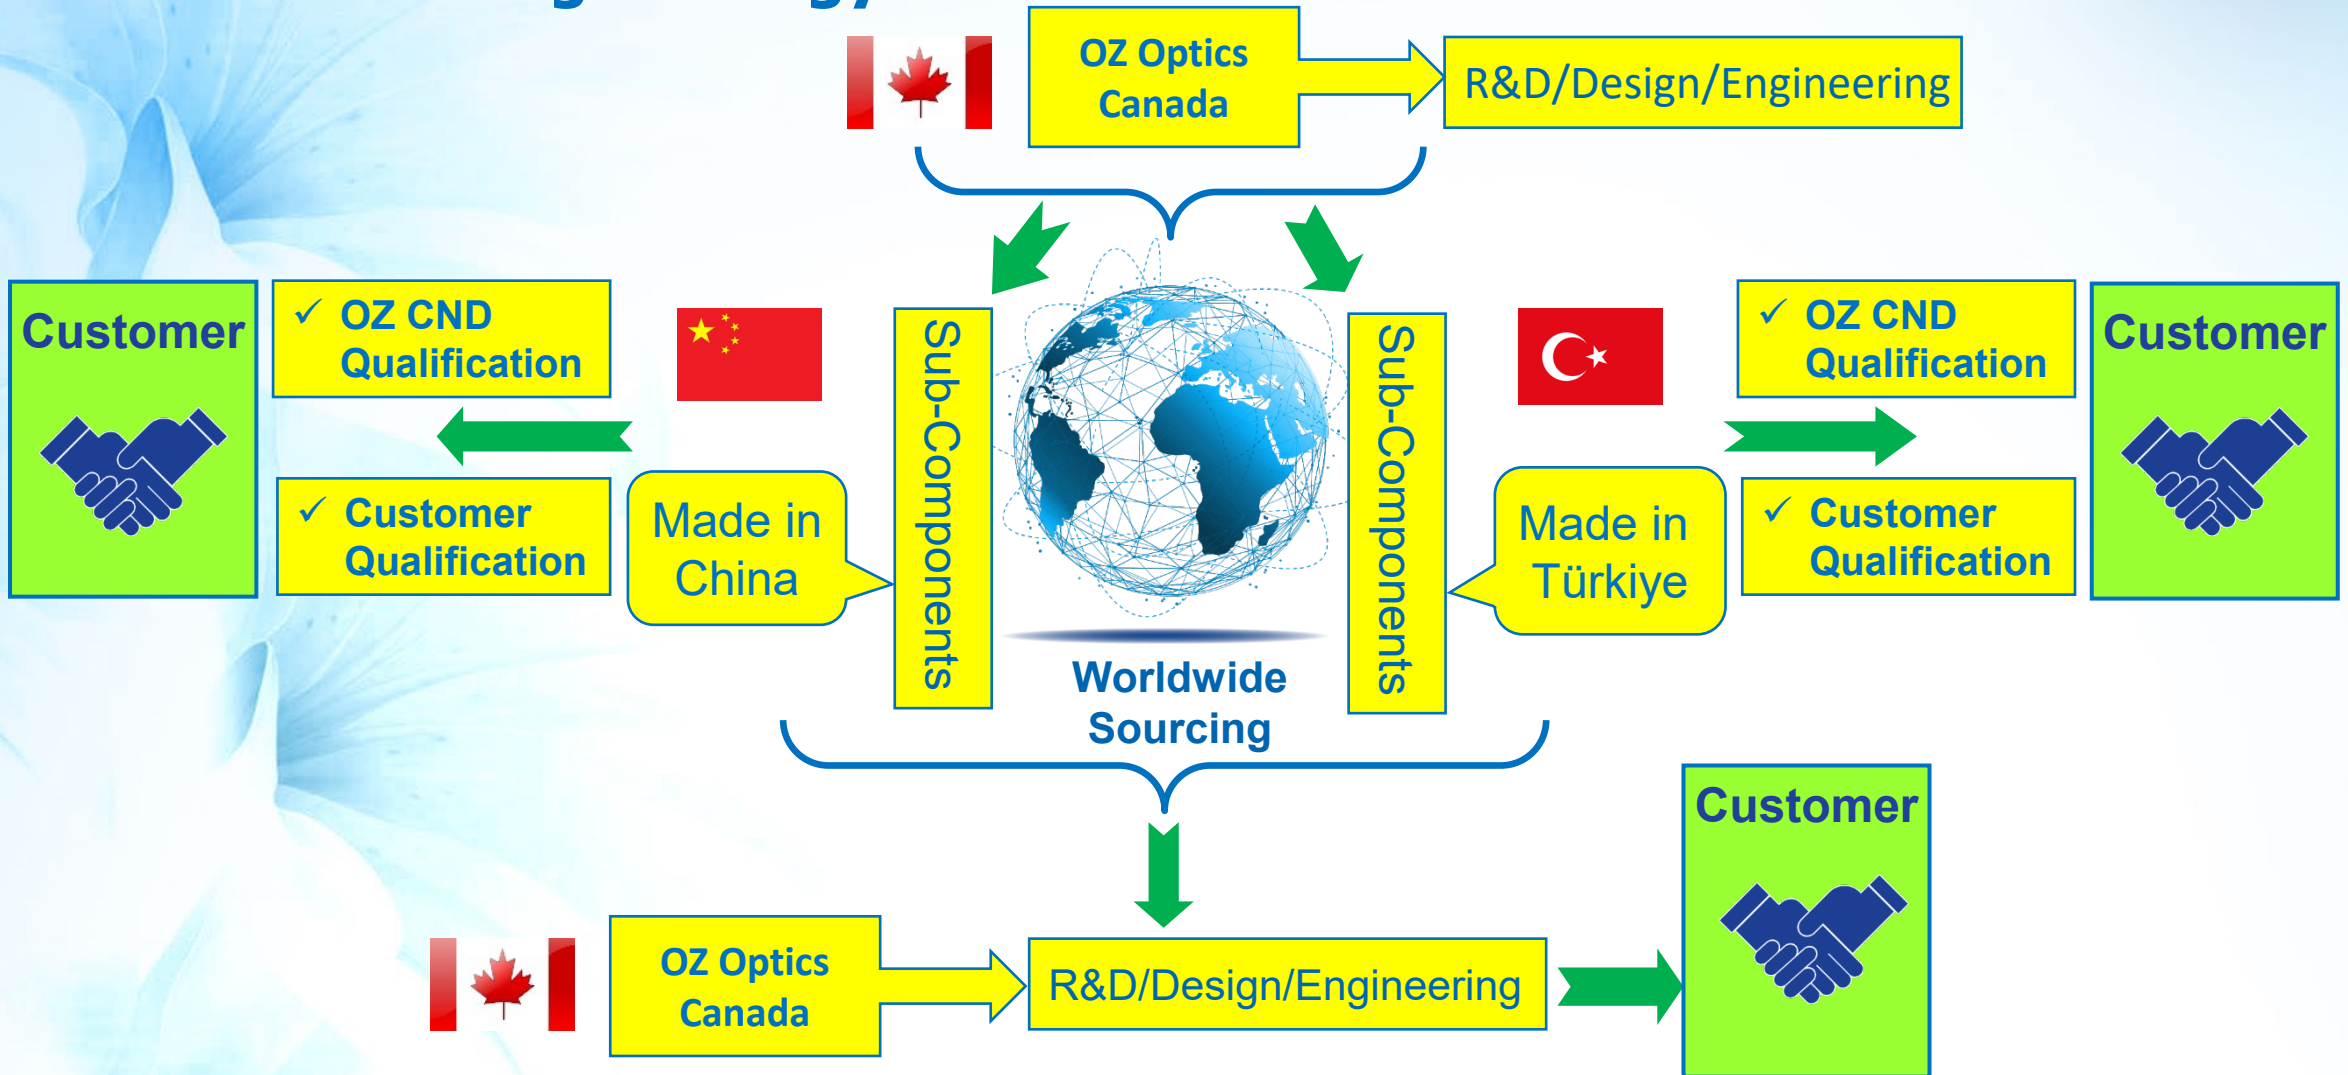



# Marketing & Operation Strategy

## Competitive Advantage

- Superior Technology  
Innovative Engineering
- Competitive Pricing
- Global Presence
- Extensive Experience  
in Fiber Optics Manufacturing
- Exceptional Quality and Service




# Branch Network



**OZ OPTICS CANADA (Headquarters)**



**OZ OPTICS TÜRKIYE (Türkiye Factory)**

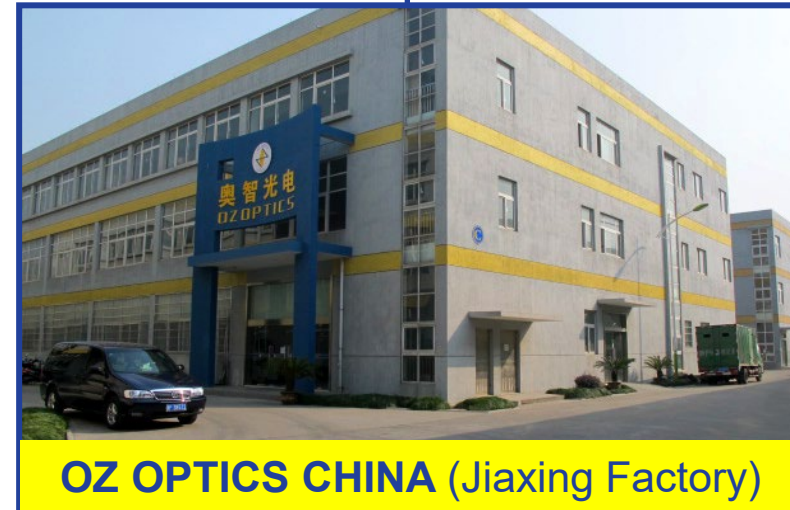

**OZ OPTICS CHINA (Jiaxing Factory)**



# Branch Network

## Facility - Ottawa Headquarters


- 60,000 sq ft. - Manufacturing and R&D Facilities
- 15,000 sq ft. - Admin, Sales and Marketing
- 15,000 sq ft. - Training and Fitness Facilities





# Branch Network

## Facility - Ottawa Headquarters

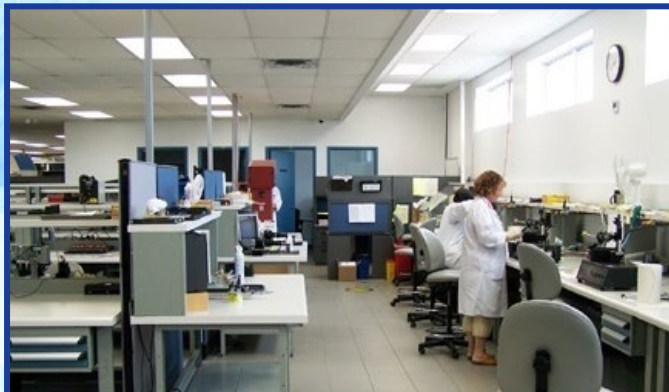

**Production Area**



**Training Centre Building**



**Meeting Room**



**Swimming Pool**



# Branch Network

## Facility - Türkiye Factory (Izmir, Türkiye)

- Operational since 2000
- 33,000 sq ft. Manufacturing Facility
- Located in Free Trade Zone
- Low Tax Rates
- Sub Component Parts Manufacturing
- High Quality Labor
- AR Coating Machine & Clean Room onsite





# Branch Network

## Facility - China Factory (Jiaxing, China)

- Operational since June 2010
- Wholly Foreign Owned Enterprise
- Cost Effective Manufacturing
- High Quality Labor
- Supply Chain Integration





# Branch Network

## Facility - China Factory (Jiaxing, China)

- Located in Economic Development Zone
- 4000+ sq meters - Total Area
  - 500 sq meters – Admin, Sales and Marketing
  - 3500 sq meters – Manufacturing Area
    - ✓ 500 sq meter – Class 10,000 Clean Room
    - ✓ 500 sq meter – ESD Working Area





# OZ Optics China

## Zhejiang OZ Optics Technologies Co., Ltd



- Operational since June 2010
- Wholly Foreign Owned Enterprise
- NPI & Production Line Setup
- On-site Training by OZ CND
- Began Mass Production in September 2010
- Completed Main Facility Expansion in 2019






# Conventional Temperature & Strain Sensors



- Temperature Sensor: Thermocouple
- Strain Sensor: Electrical Strain Gauge
  - Temperature Influence
  - Electromagnetic Interference (EMI)
  - Humidity Influence
  - Point Sensor

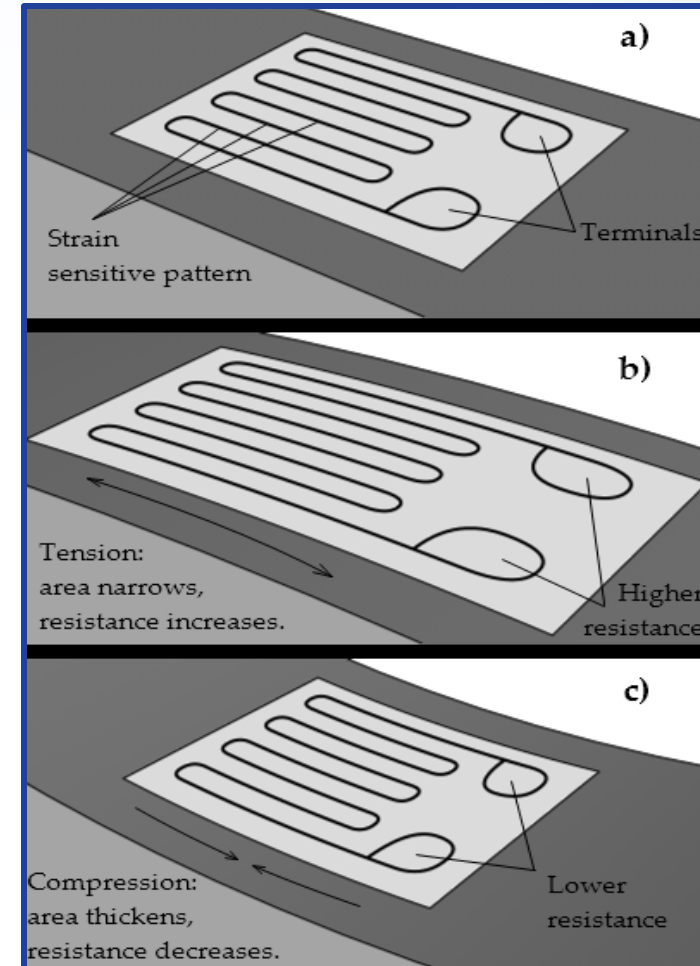



# Fiber Optic Sensors



- **Advantages of Fiber Optic Sensors**

- Electrically insulating materials (no electrical cables are required)  
— high voltage environments
- Chemically passive, not subject e.g. to corrosion
- Immune to electromagnetic interference (EMI)
- Wide operating temperature range

- **Fiber Bragg Grating Sensor**

- Strain resolution and accuracy:  $< 2 \mu\epsilon$
- Cannot distinguish strain and temperature
- Point sensor

- **Distributed Fiber Optic Sensors**

- Raman scattering based — only temperature
- Brillouin scattering based — both temperature and strain
- Rayleigh scattering based — DAS, Luna (70 m long sensing fiber)




# Fiber Optic Sensors



- **Fiber Bragg Grating Sensor**
  - Sensor medium: Fiber Bragg grating
  - Laser source and data acquisition system: Spectrum analyzer
- **Distributed Fiber Optic Sensors (Brillouin Sensors)**
  - Sensor medium: Conventional communication fiber (such as SMF, LEAF, etc..)
  - Laser source and data acquisition system: Brillouin sensor system
    - **OZ Optics** [Foresight™ DSTS (Distributed Strain and Temperature Sensors)]
    - **Omnisens** (STA)
    - **Yokogawa** (AQ8603) (Discontinued)
    - **Sensornet** (DTSS)
    - **Neubrex** (Neubrescope)
    - **fibrisTerre** (fTB 2505)
    - **febus**



# Working Principle — BOTDA

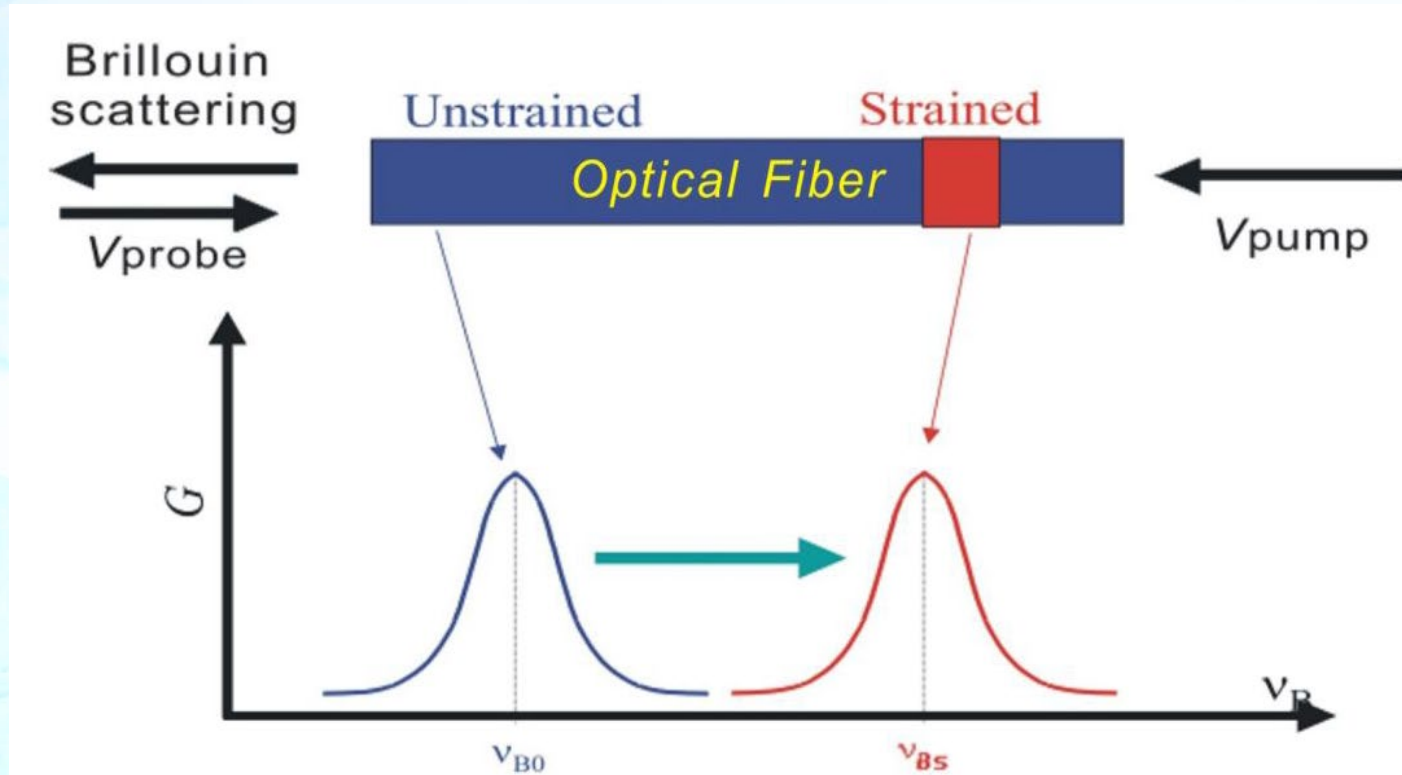

$$\nu_B = \nu_{B0} + C_T (T - T_0) + C_\varepsilon (\varepsilon - \varepsilon_0)$$

$T$  and  $\varepsilon$  are variables. In order to differentiate these two variables, Brillouin peak in the spectrum is required.

# Working Principle — BOTDA

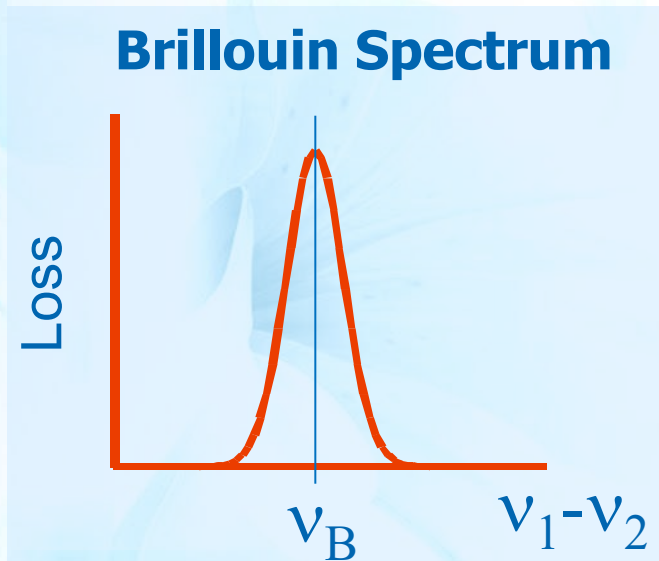
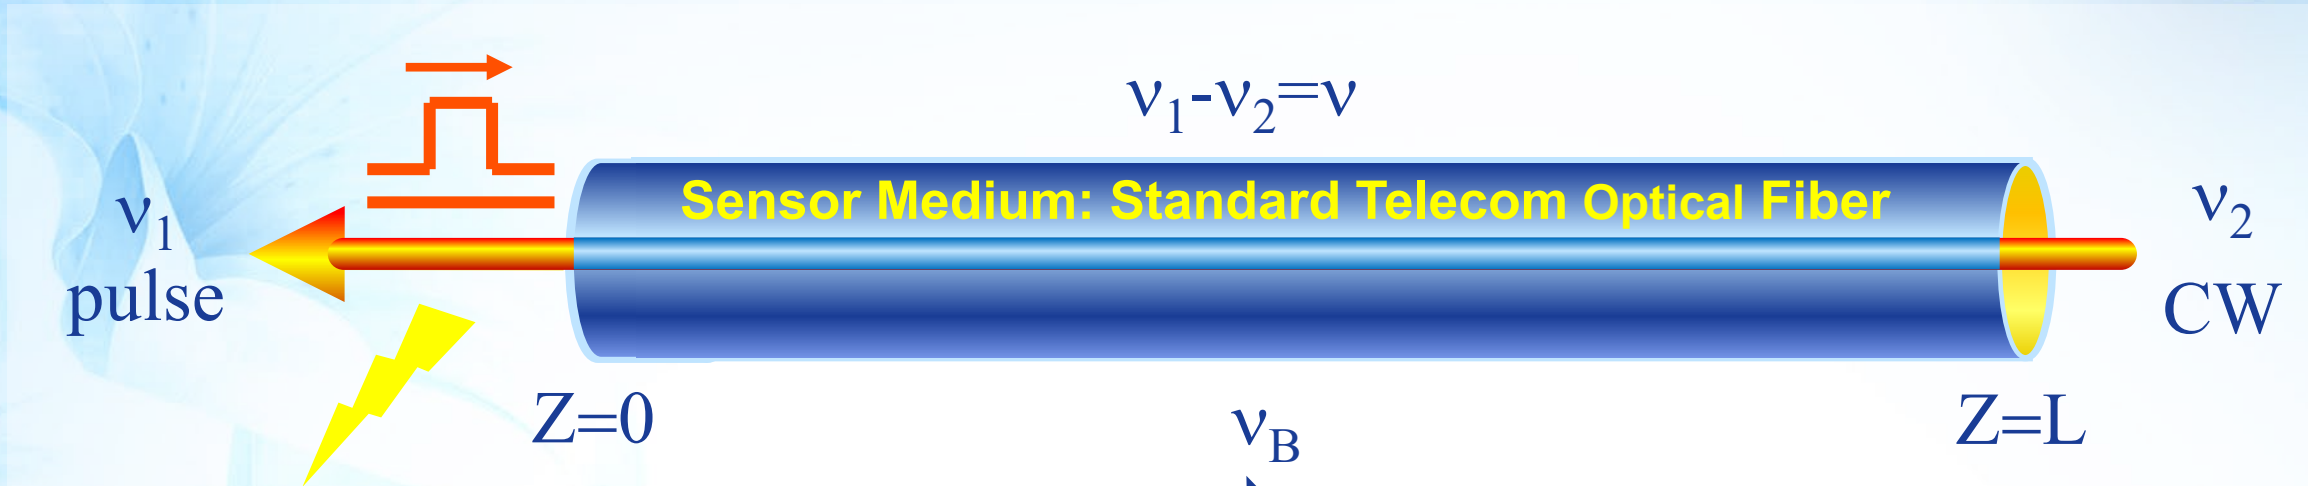


When the beat frequency matches intrinsic Brillouin frequency of the fiber  $\nu_B$ , we will get maximum of Brillouin spectrum.

$\nu_B$  changes linearly with the strain and temperature exerted.


$$\nu_B = \nu_{B0} + C_T (T - T_0) + C_\epsilon (\epsilon - \epsilon_0)$$

# Comparison of BOTDR and BOTDA

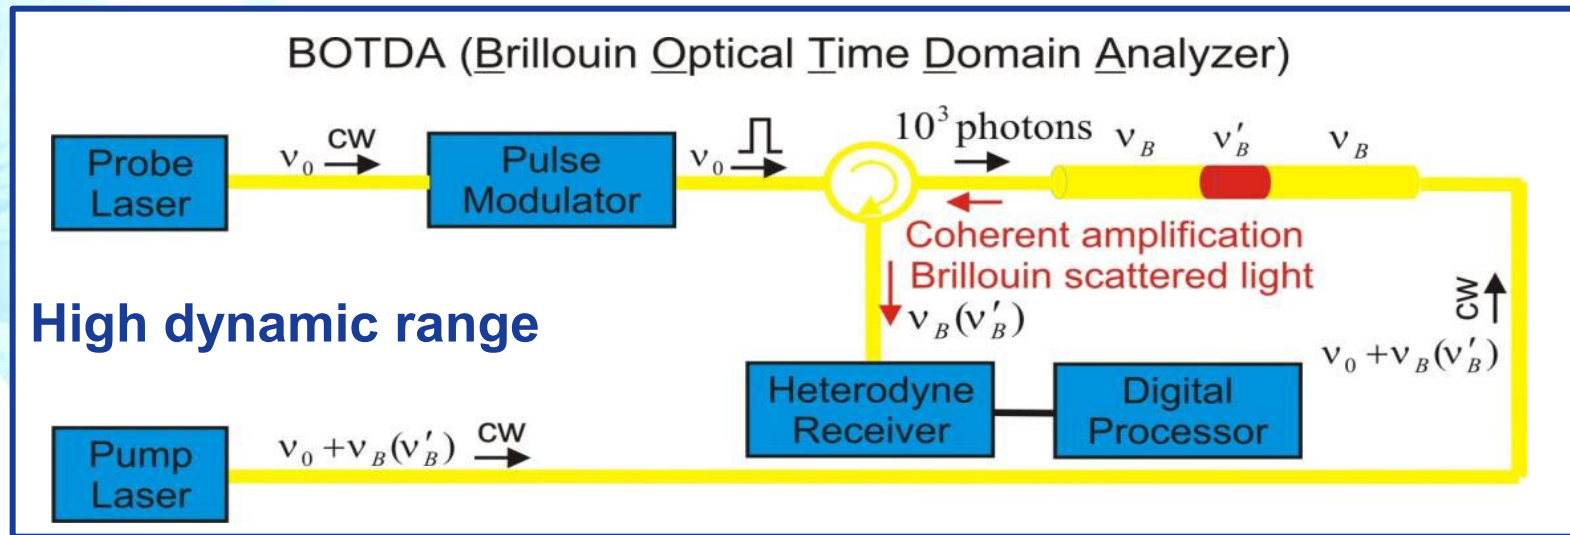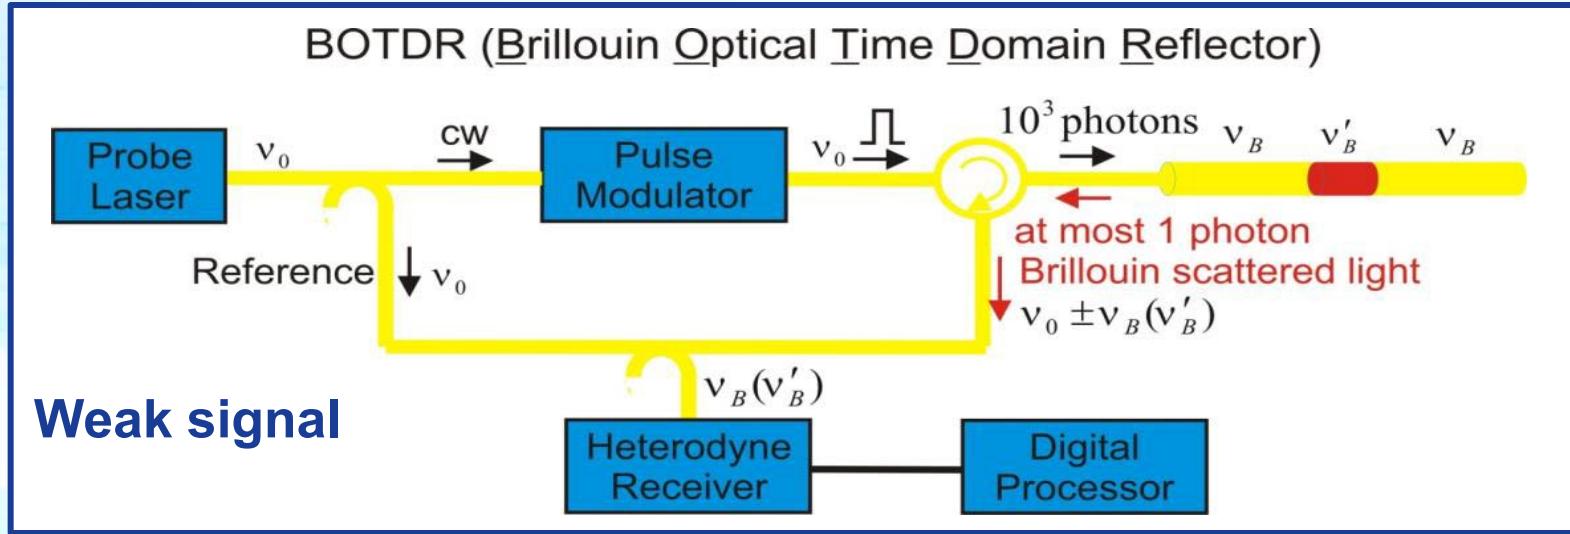



# 3U + Laptop, 4 Channel Model

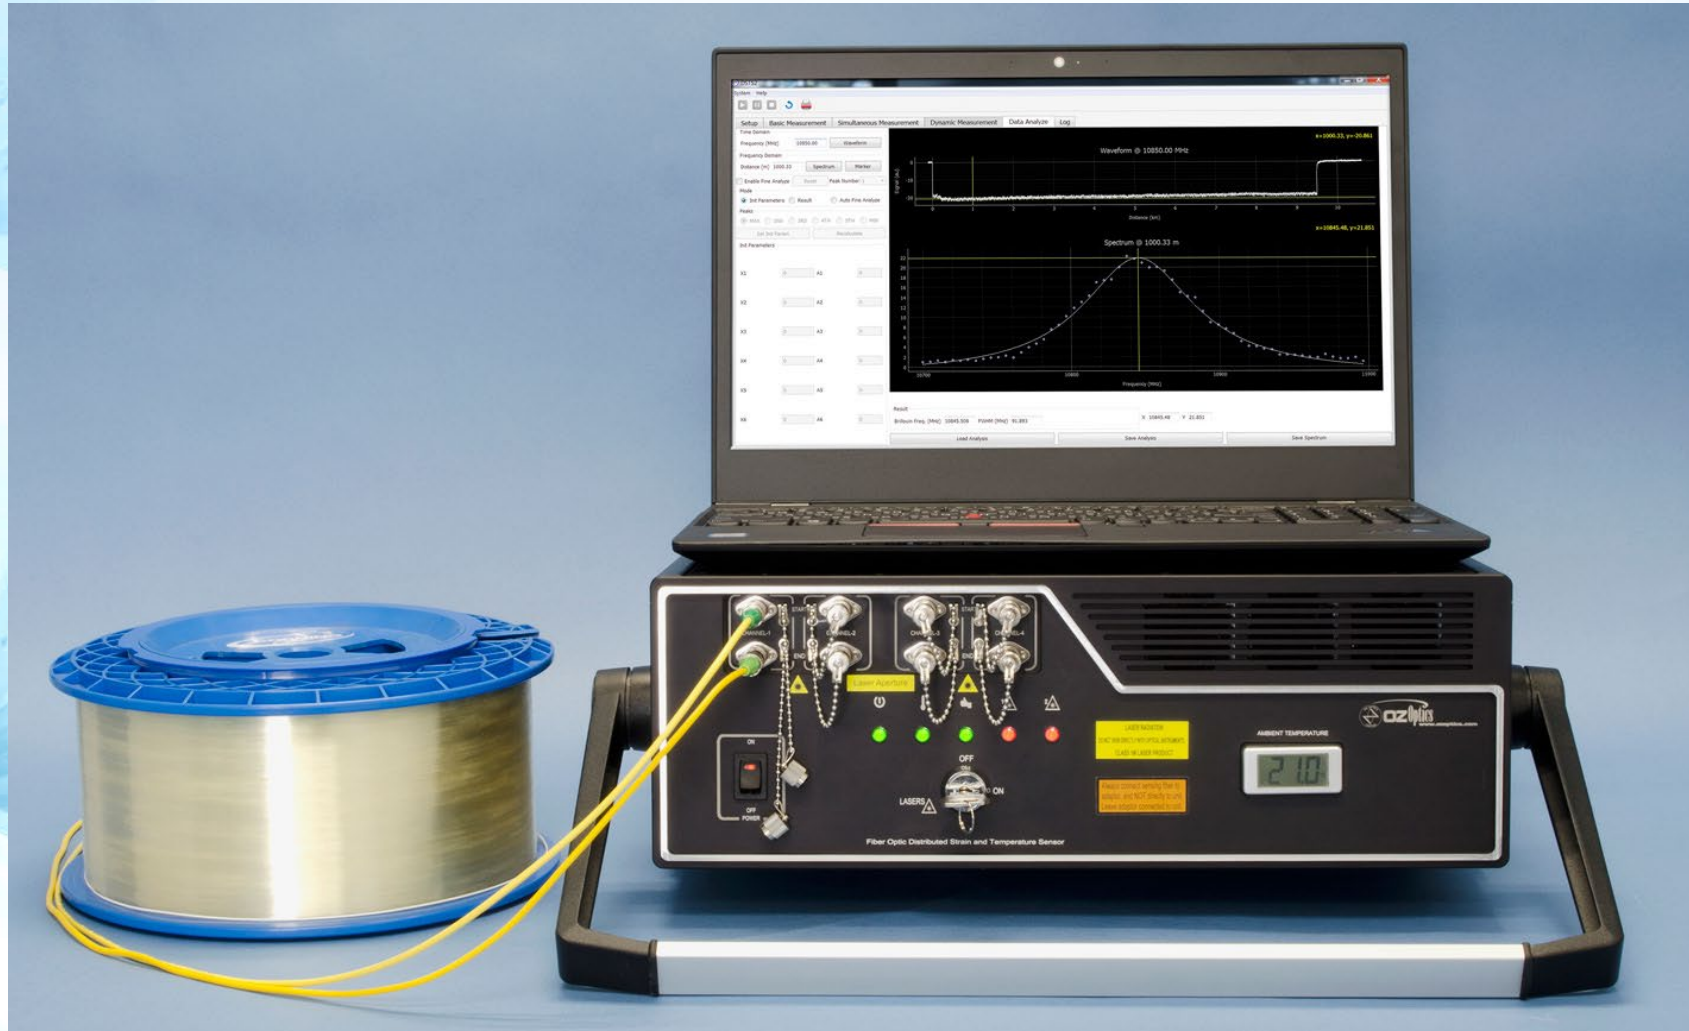

# Foresight™ DSTS

## Awards & Accolades



### Silver Level Winner



**US Patents #: 7499151, 7599047 and 9568307**

# Merits of DSTS BOTDA

- **Coherent Amplification of Brillouin Scattering Signal**  
⇒ Longest measured range (200 km fiber length)
- **Narrowest Brillouin Spectrum (~ 45 MHz )**  
⇒ Highest resolution of strain and temperature
- **Special Low Loss Fiber Components and Electronic Processing**  
⇒ High stability of system
- **With Proprietary Techniques, Brillouin Frequency Is Extracted Accurately**  
⇒ Highest accuracy in measuring strain and temperature separately or simultaneously
- **New Technology**  
⇒ Quick measurement of strain and temperature (as low as 1 second: 1 Hz)



# Merits of DSTS BOTDR

- **Low Noise Detection for Weak Spontaneous Brillouin Scattering Signal**
  - ⇒ Long measured range (70 km in one direction)
- **Special Low Loss Fiber Components and Electronic Processing**
  - ⇒ High stability of system
- **Sophisticated Design**
  - ⇒ Small size and light weight



# Double End (A) Competitive Analysis



Company	OZ Optics	OmniSens	Neubrex	fibrisTerre
Technology	<b>BOTDA</b>	BOTDA	BOTDA	BOFDA
Maximum Sensing Range	<b>(fiber length up to 200 km)</b>	60 km (120 km max. total fiber loop distance)	27 km	25km
Channels	<b>Internal 4 External 24 More channels optional</b>	Internal 4 up to 20 channels via external SO-N Switch module	N/A	N/A
Highest Spatial Resolution / Spatial step (sample interval)	<b>10 cm<sup>1</sup> / 5 cm</b>	50 cm / 25 cm	2 cm / 1 cm	50 cm / 5 cm
Dynamic Range at highest spatial resolution	<b>7 dB</b>	N/A	0.5 dB	N/A
Strain / Temperature Accuracy (Repeatability)( $\sigma$ )	<b>2 <math>\mu\epsilon</math> / 0.1 °C (1 m spatial resolution / 2 km fiber / 1 minute 40 seconds)</b>	2 $\mu\epsilon$ / 0.1 °C (1 m spatial resolution / 2 km fiber / 10 minutes)	7.5 $\mu\epsilon$ / 0.35 °C	2 $\mu\epsilon$ / 0.1 °C
Strain / Temperature Resolution	<b>0.1 <math>\mu\epsilon</math> / 0.005 °C</b>	2 $\mu\epsilon$ / 0.1 °C	N/A	N/A

Specifications of other vendor's products are based on their public datasheets.

1) Based on scientific definition, the spatial resolution is defined by pulse width. 10ns pulse width is equivalent to 1 m spatial resolution while 1ns pulse width is equivalent to 0.1 m spatial resolution.



# Single End (R) Competitive Analysis



Company	OZ Optics	OmniSens	Neubrex	Febus
Technology	<b>BOTDR</b>	BOTDR	BOTDR	BOTDR
Channels	<b>Internal 4 External 24 More channels optional</b>	Internal 4 up to 20 channels via external SO-N Switch module	N/A	N/A
Maximum Sensing Range	<b>70 km (max 100 km)</b>	45 km	27 km	30 km (max 100 km)
Highest Spatial Resolution / Spatial step (sample interval)	<b>1 m<sup>1</sup> / 5 cm</b>	1.5 m / 25 cm	0.5 m / 5 cm	1m
Dynamic Range at highest spatial resolution	<b>10 dB</b>	10 dB	2 dB	N/A
Strain / Temperature Accuracy (Repeatability) ( $\sigma$ )	<b>10 <math>\mu\epsilon</math> / 0.5 °C</b>	20 $\mu\epsilon$ / 1 °C	30 $\mu\epsilon$ / 1.5 °C	10 $\mu\epsilon$ / 0.5 °C
Strain / Temperature Resolution	<b>0.1<math>\mu\epsilon</math> / 0.005 °C</b>	2 $\mu\epsilon$ / 0.1 °C	N/A	N/A

Specifications of other vendor's products are based on their public datasheets.

1) Based on scientific definition, the spatial resolution is defined by pulse width. 10ns pulse width is equivalent to 1m spatial resolution while 1 ns pulse width is equivalent to 0.1 m spatial resolution.



# Combo Unit Competitive Analysis



Company	OZ Optics		OmniSens		Neubrex	
Technology	<b>BOTDA</b>	<b>BOTDR</b>	BOTDA	BOTDR	BOTDA	BOTDR
Maximum Sensing Range	(fiber length up to 160 km)	<b>70 km</b> (max 100 km)	60 km (120 km max. total fiber loop distance)	45 km	27 km	27 km
Channels	<b>Internal 4</b> <b>External 24</b> <b>More channels optional</b>		Internal 4 up to 20 channels via external SO-N Switch module		N/A	
Highest Spatial Resolution / Spatial step (sample interval)	<b>10 cm<sup>1</sup> / 5 cm</b>	<b>1 m<sup>1</sup> / 5 cm</b>	50 cm / 25 cm	1.5 m / 25 cm	2 cm / 1 cm	0.5 m / 5 cm
Dynamic Range at highest spatial resolution	<b>7 dB</b>	<b>10 dB</b>	N/A	N/A	0.5 dB	2 dB
Strain / Temperature Accuracy ( Repeatability)( $\sigma$ )	<b>2 <math>\mu\epsilon</math> / 0.1 °C</b> (1 m spatial resolution / 2 km fiber / 1 min 40 secs)	<b>10 <math>\mu\epsilon</math> / 0.5 °C</b>	2 $\mu\epsilon$ / 0.1 °C (1 m spatial resolution / 2 km fiber / 10 mins)	20 $\mu\epsilon$ /1°C	7.5 $\mu\epsilon$ / 0.35 °C	30 $\mu\epsilon$ / 1.5 °C
Strain / Temperature Resolution	<b>0.1 <math>\mu\epsilon</math> / 0.005 °C</b>	<b>0.1 <math>\mu\epsilon</math> / 0.005 °C</b>	2 $\mu\epsilon$ / 0.1 °C	2 $\mu\epsilon$ / 0.1 °C	N/A	N/A

Specifications of other vendor's products are based on their public datasheets.

1) Based on scientific definition, the spatial resolution is defined by pulse width. 10ns pulse width is equivalent to 1m spatial resolution while 1ns pulse width is equivalent to 0.1m spatial resolution.




# Detailed Comparison Facts

**Sensing Range** - The Longest Functional Measurement Fiber Length.


Results comparison between OZ unit and other vendor's unit.

Fiber under test is 101km long. Results are displayed below. Same test configurations are applied.


## Other Vender

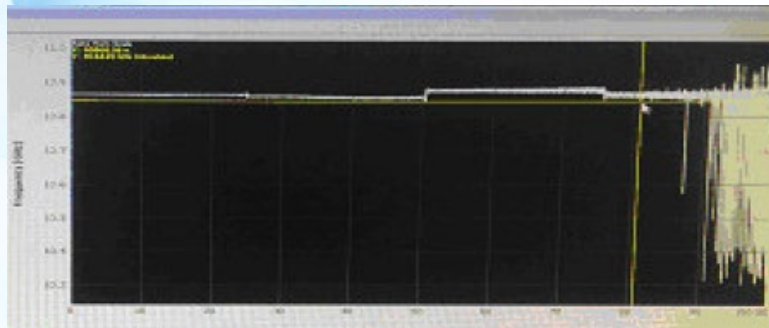


## OZ Optics DSTS

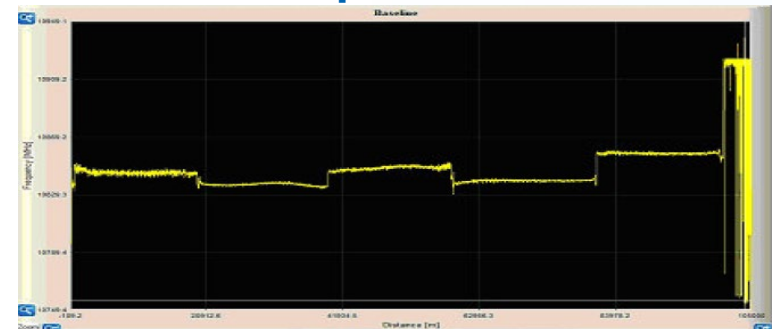

## Brillouin Center Frequency vs Fiber Length (Full Scale)

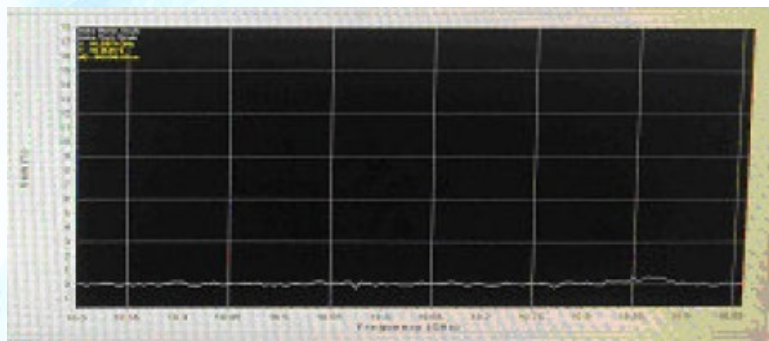

Brillouin Spectrum at 80km.  
Reasonable Spectrum can be only found at 55km.

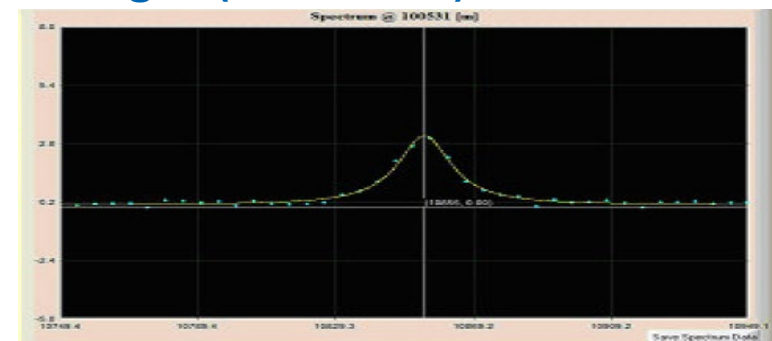

Brillouin Spectrum at 100.5km.





# Comparison: DSTS BOTDA and Raman based DTS



Company	OZ Foresight™ DSTS	Raman based DTS
Max Fiber Length	200 km round-trip (physical distance 100 km)	20km (MM)
Fiber Type	Standard telecom singlemode	Multimode
Response time @ 20km, 2C Resolution	30 seconds to 3 minutes	More than 10 minutes
Configuration	Single ended or double ended	Single ended or double ended
Measurement Base and Precision	Frequency based No calibration required after setup Not sensitive to attenuation changes	Intensity based Require calibrations Sensitive to attenuation changes
Dynamic Range	25-30 dB Allows better immunity to attenuation Wider measurement range and longer use of installed fiber	3-4 dB May fail when attenuation increases
Measurand	Temperature and Strain	Temperature
Measurement Resolutions	Comparable @ several seconds	Comparable @ over 1 minute



# Competitive Analysis

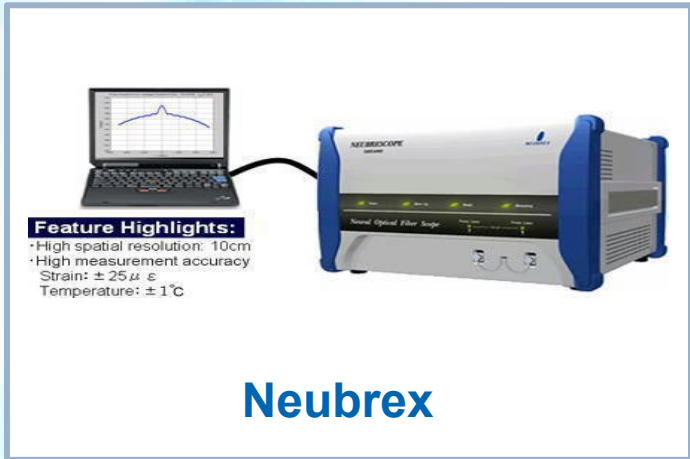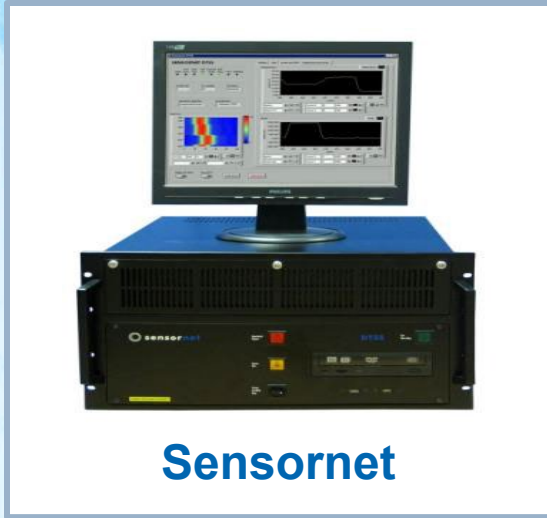



# New Features




- **Switched to only 3U design with laptop computer (1U PC is option only per demand and will increase the overall cost due to limited availability).**
- **Full DLL Support**
- **Auto-Recovery from Power Outage**
- **Auto Channel Switch allows continuous scans between channels. Various switches are available.**
- **Optional SCADA interface under development and will be available within 2 months.**

# New GUI Login



Choose Mode


**B-OTDA**

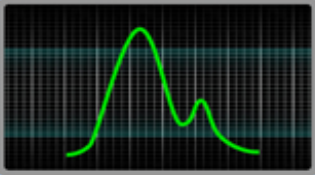

STRAIN & TEMPERATURE  
HIGH-RESOLUTION  
HIGH-SPEED

BRILLOUIN ANALYZER


**B-OTDR**

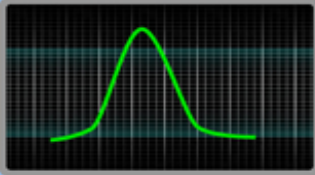


LOW-RESOLUTION  
COMBINED  
STRAIN & TEMPERATURE

BRILLOUIN REFLECTOMETER

**REVIEW &  
ANALYZE DATA  
B-OTDA**



**REVIEW &  
ANALYZE DATA  
B-OTDR**



DSTS2 Login

Username:

Password:

Login Register/  
Reset Password Play Video Exit

Help

# Database



Database Search

Search Criteria

Detail:

Channel:  External Switch

Date: From:

To:

- Basic Measurement Baseline ch3TC
- Basic Measurement Baseline ch4
- Basic Measurement Baseline ch3
- Basic Measurement Baseline ch2
- Basic Measurement Baseline ch1
- Baseline\_Jun291017\_5
- Baseline\_Jun291014\_3
- Baseline\_Jun291013\_1
- test
- ch2TC
- ch3TC
- ch4fiber
- ch3fiber
- ch2fiber

Detail (description):

Basic Measurement Baseline ch1

Channel No.:

Fiber Length:

Fiber Type:

Pulse Width:

Spatial Step:

Average No.:

Input Range:

Start Frequency:

End Frequency:

Frequency Step:

Fiber Type 1:

Fiber Type 2:

Connection Point:

Date/Time:

UUID:

Category:





Measurement Type:

Imported:

Imported Path:

Database Management

# Measurement Screens

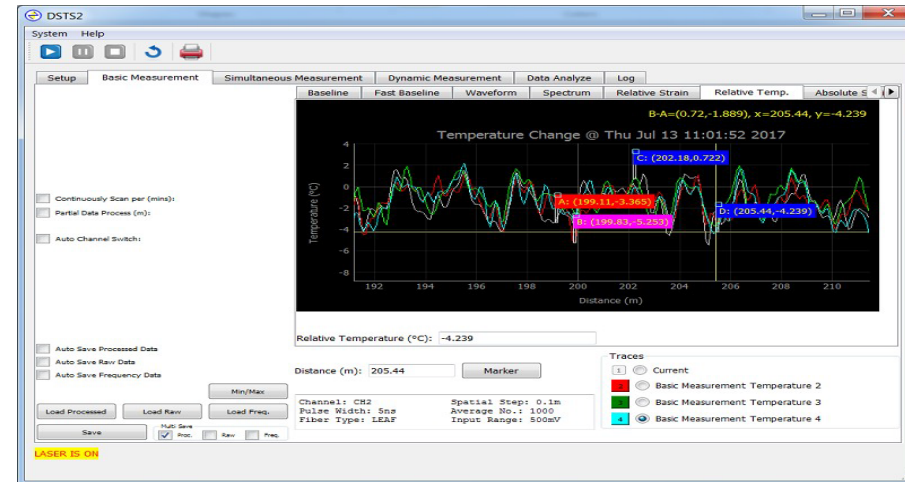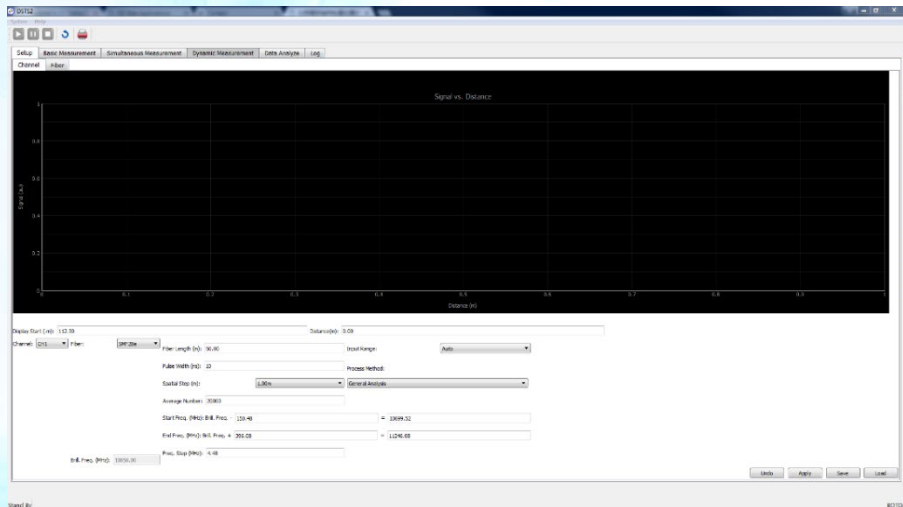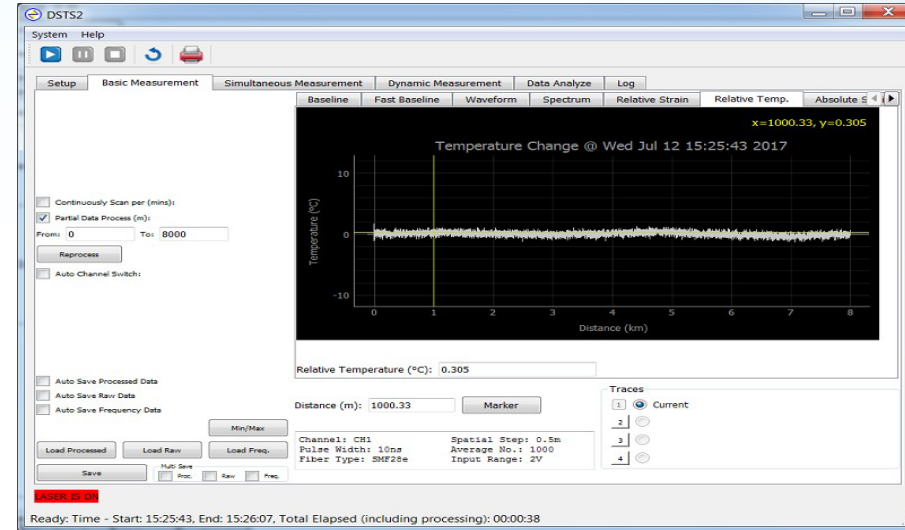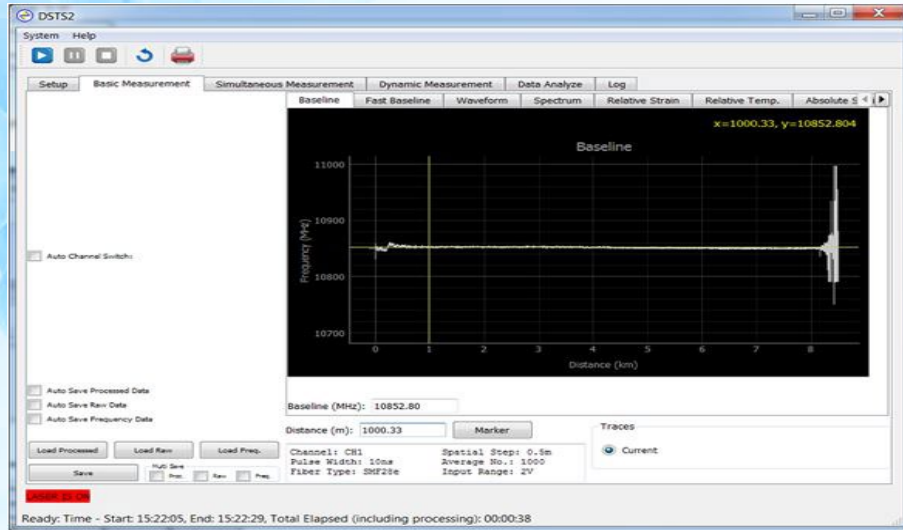

The logo features a blue triangle pointing right with a yellow triangle inside it, positioned to the left of the main title text.

# **OZ Optics Foresight™ DSTS Benefits**




- **Reducing Risk and Influence of Failure**
  - **Fast Response**
  - **Status Trend in Long Term**
  - **Full Range of Coverage**
- **Reducing Operating Expenses**
  - **No Future Re-Calibration of Unit**
  - **Expected Cable Life over 20 Years**

# Applications



**Oil and Gas Pipeline Monitoring**

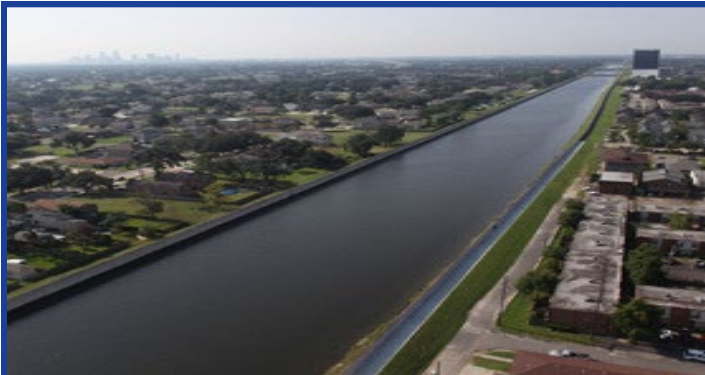

**Dyke and Levee Monitoring**



**Power Line Monitoring**



**Oil and Gas Well Monitoring**



**Bridge and Building Monitoring**



**Border Security Monitoring**



# Oil and Gas




- Pipeline Leakage Monitoring
- Well Integrity Management
- Refinery Temperature Monitoring



# Pipeline Leakage Monitoring System




- Policy Requirement
- Economic Requirement

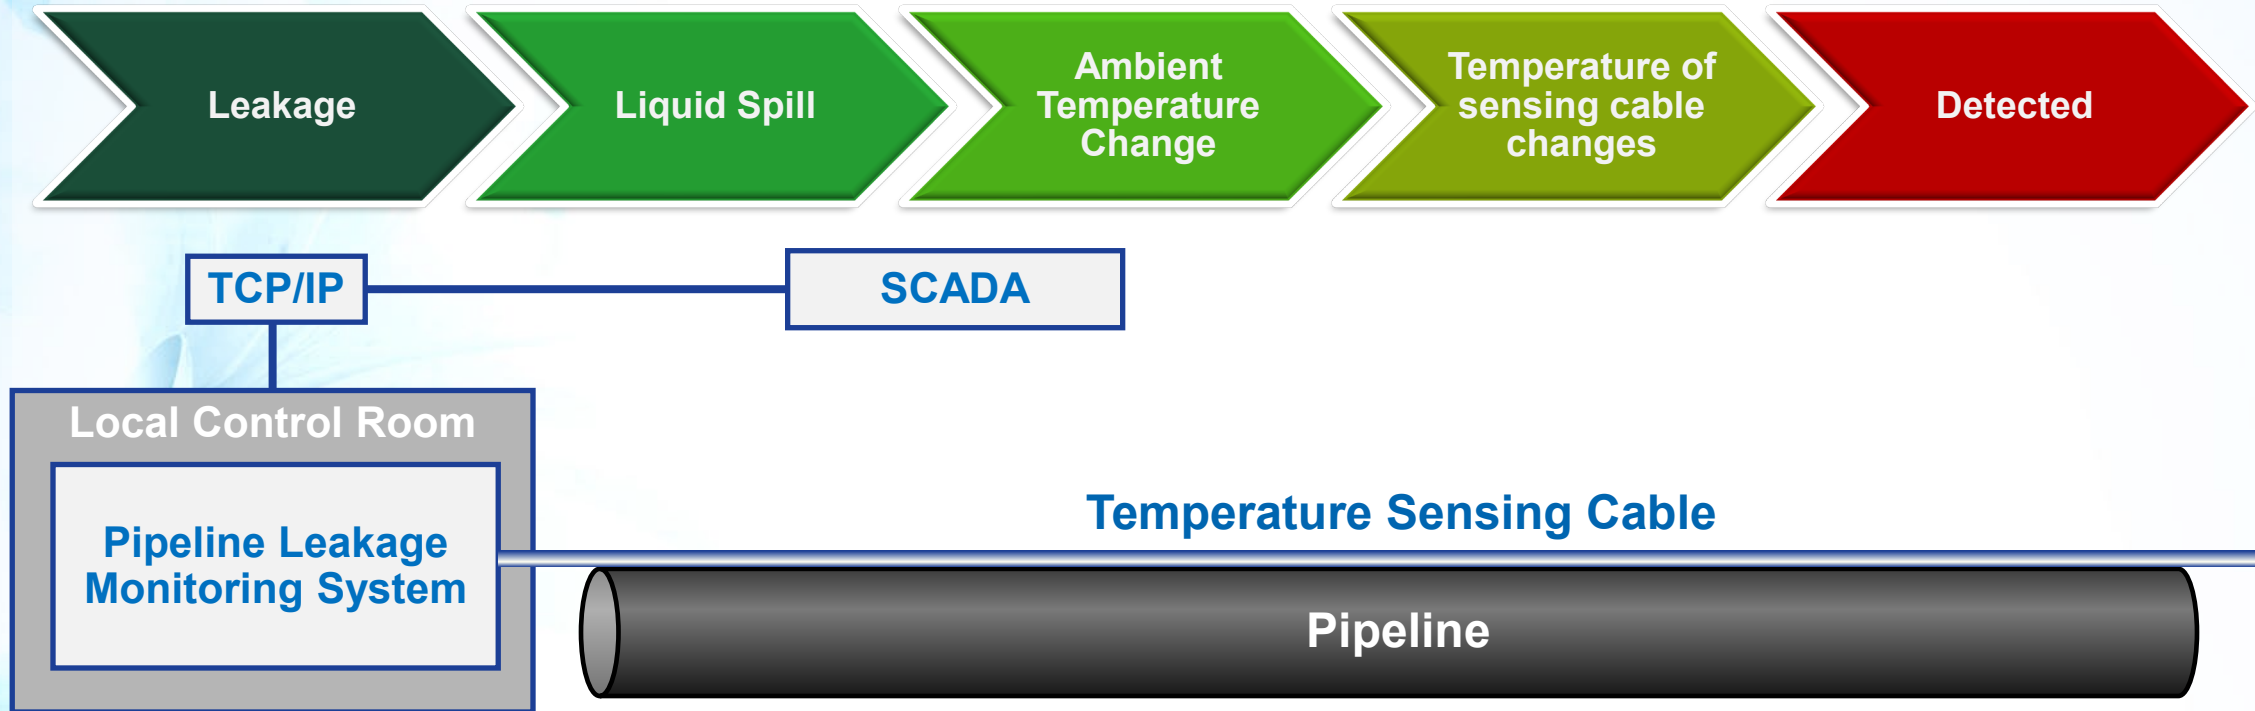


# Third Party Evaluation




- Leakages from a 1/8" orifice with an injection pressure as low as 22 psi, and a temperature difference of 20°F between the soil and line temperatures, have been easily detected and accurately located.
- An impressive leakage detection response time of less than 2 minutes has been achieved.
- Evaluation was done under laboratory conditions over a period of one month, by Southwest Research Institute (SwRI) and funded by major oil companies through a joint industry program.

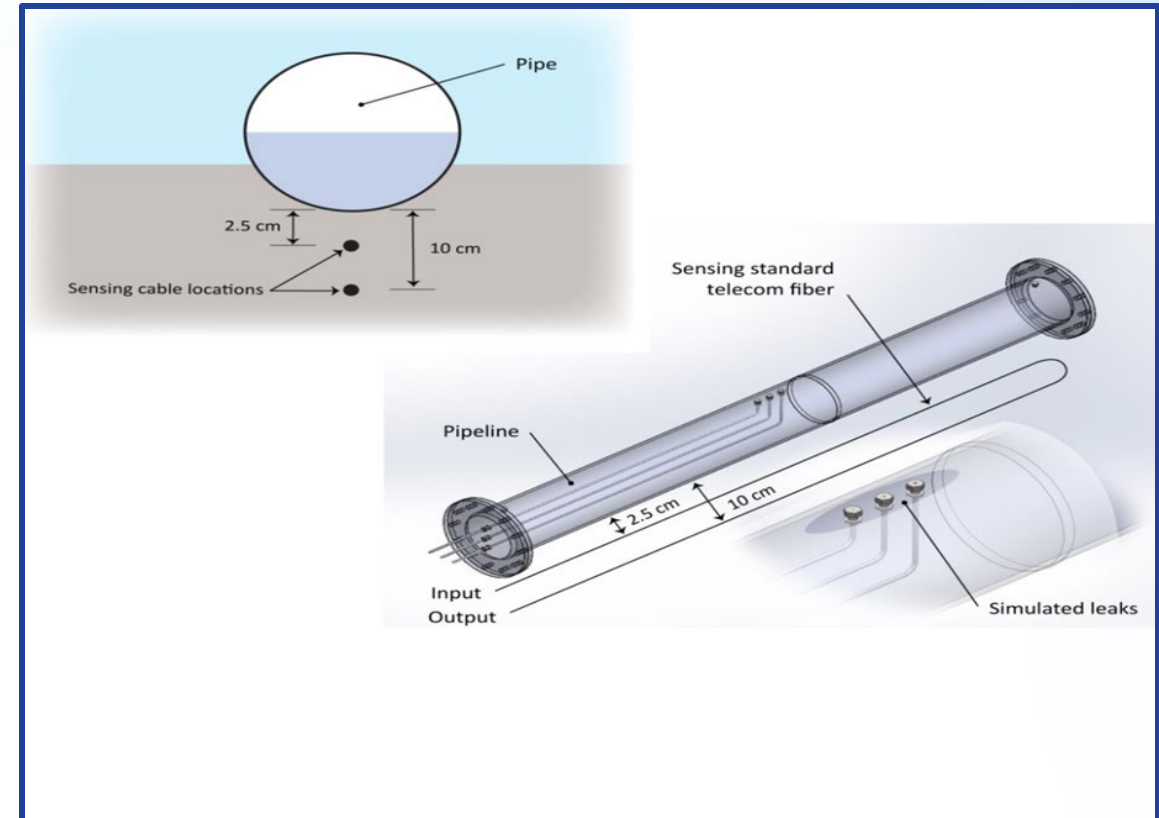

# Performance

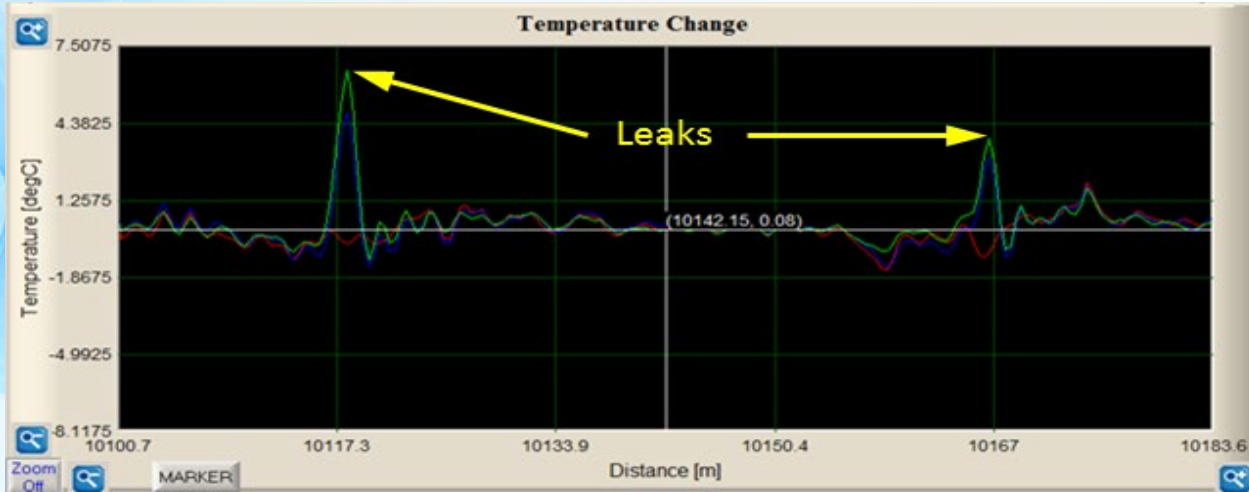





Large leakage detection from 1/8" orifice with 400 psi injection pressure, soil temperature before test: 85°F, line temperature: 115°F

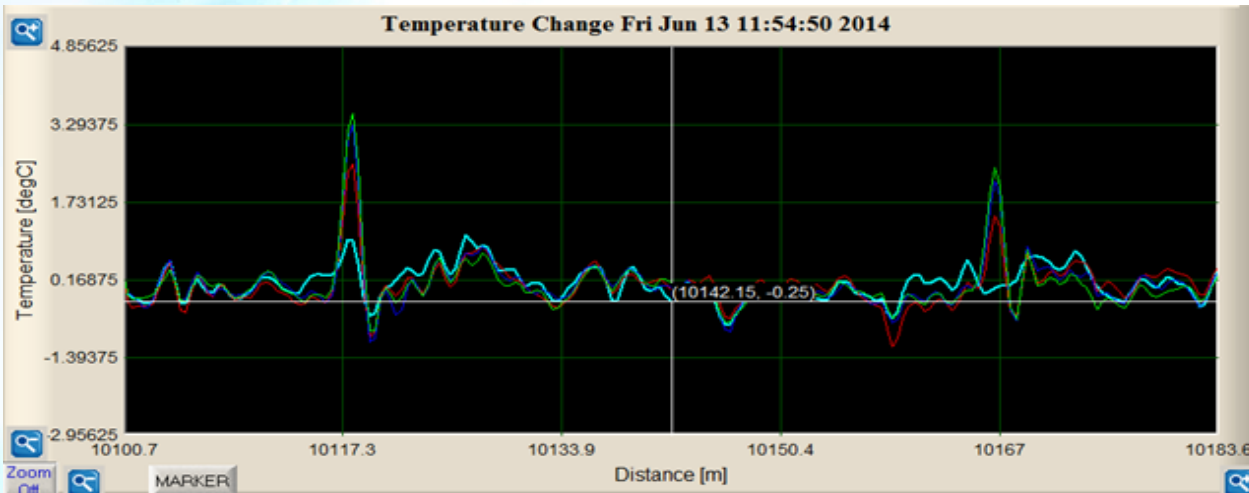

Small leakage detection from 1/8" orifice with 50 psi injection pressure, soil temperature before test: 73°F, line temperature: 90°F



# Soil Temperature Monitoring

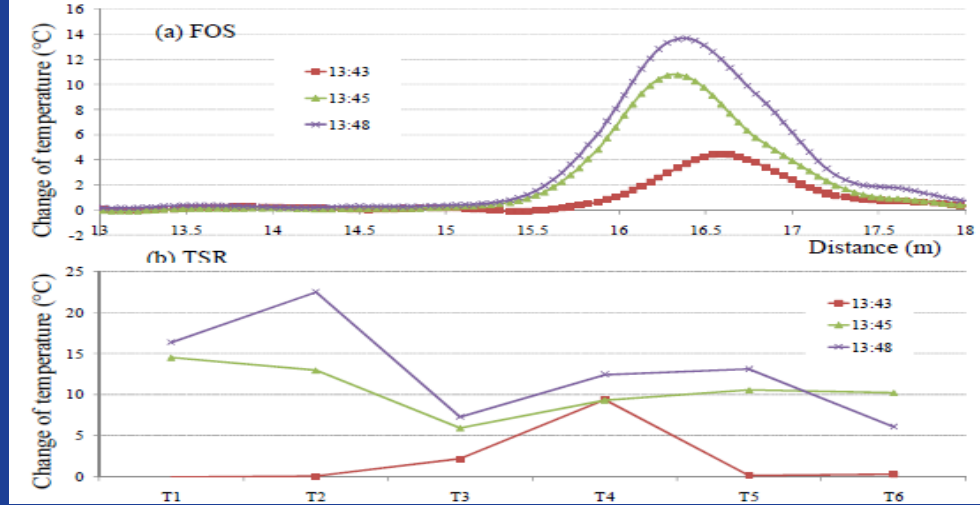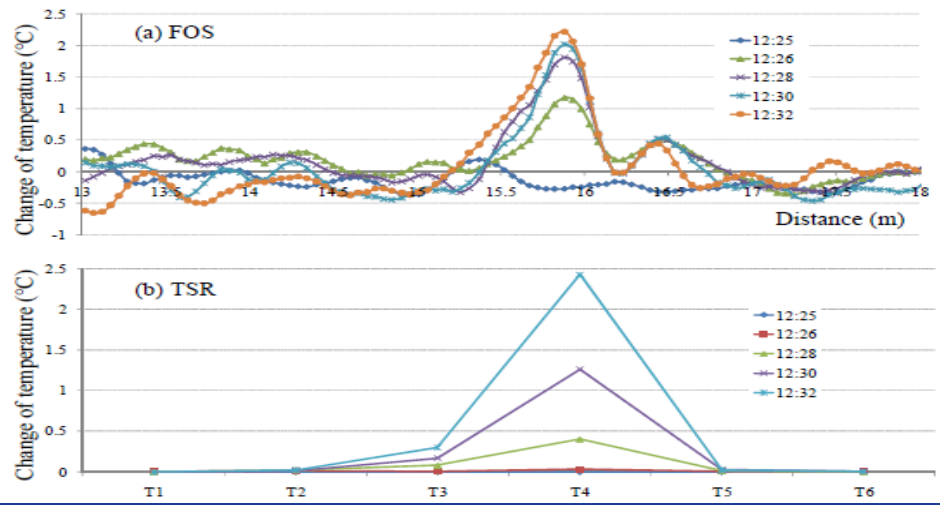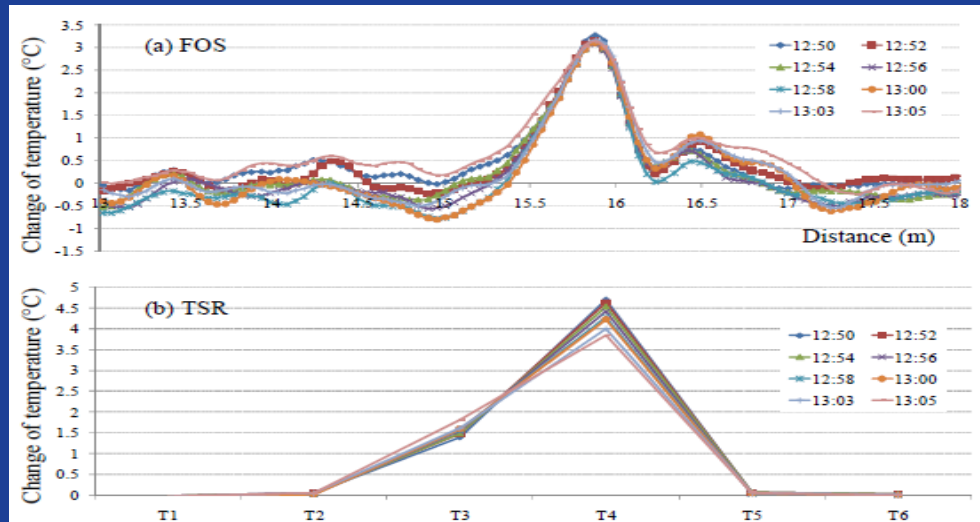
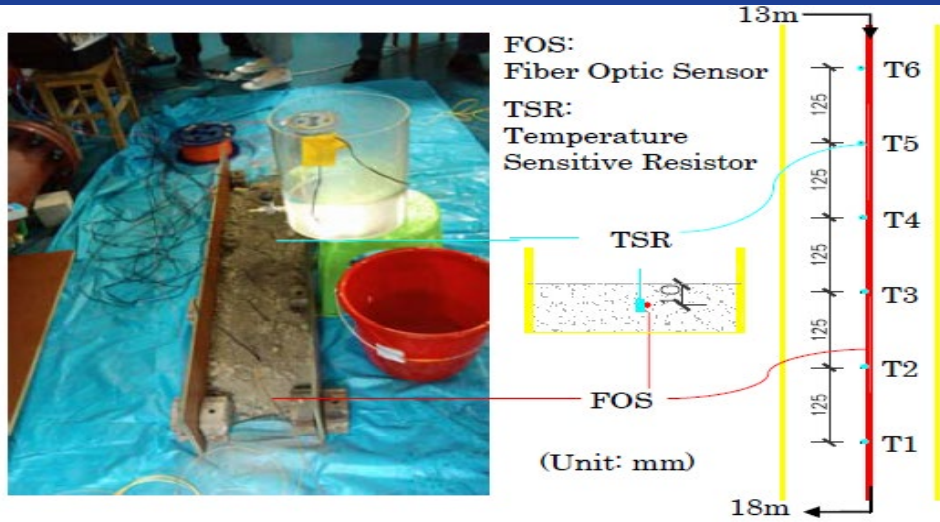




# Pipeline Corrosion Monitoring



Pipeline corrosion monitoring in Canmet Materials Technology Laboratory, NRCan, Ottawa, NACE International — Corrosion 2008 Conference and Expo, New Orleans (Louisiana, USA 16-20 March, 2008).


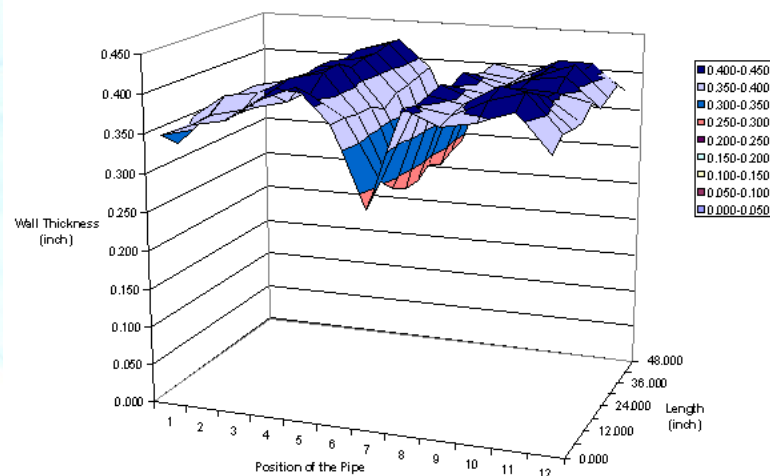
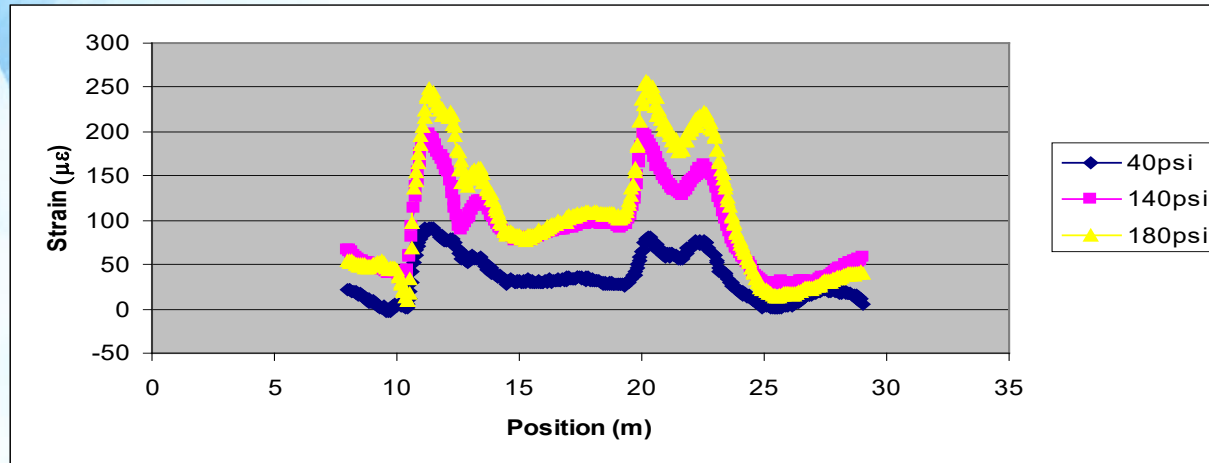




# Pipeline Corrosion Monitoring




Pipeline corrosion monitoring in Canmet Materials Technology Laboratory, NRCan, Ottawa, NACE International — Corrosion 2008 Conference and Expo, New Orleans (Louisiana, USA 16-20 March, 2008).

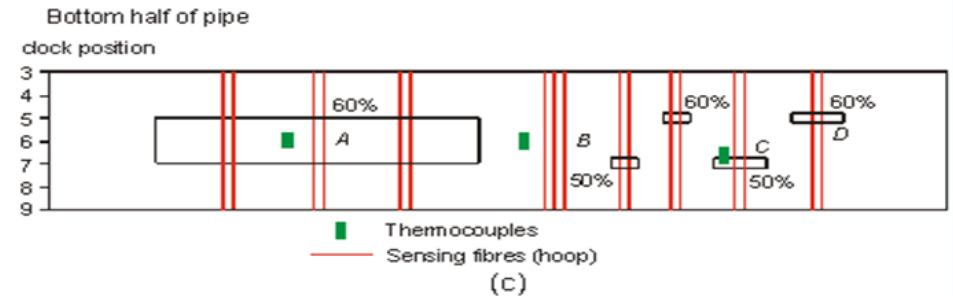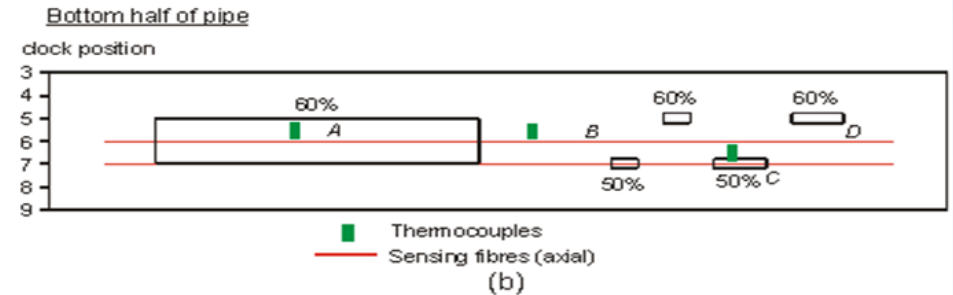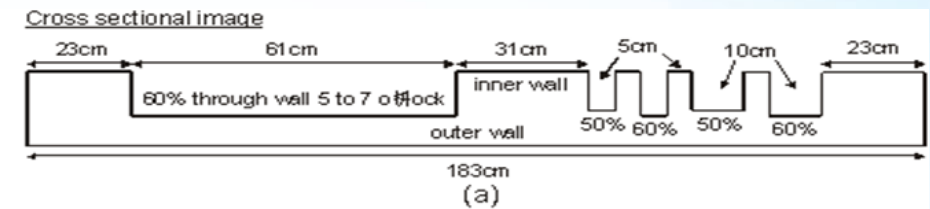

# Refinery Temperature Monitoring




- Refineries use reactors and pressure vessels to transform heavy oil into synthetic crude oil.
- The upgrader reactors are operated at very high temperatures, exceeding 500 °C.
- Due to the thermal stress exerted on the structure of the reactor, a wall-thinning problem might occur, resulting in conductive heat dissipation.
- Without the proper sensing technology, the refinery operator might prematurely shut down operations to perform untimely maintenance, or worse yet, the problem might go unnoticed, resulting in a catastrophic accident.

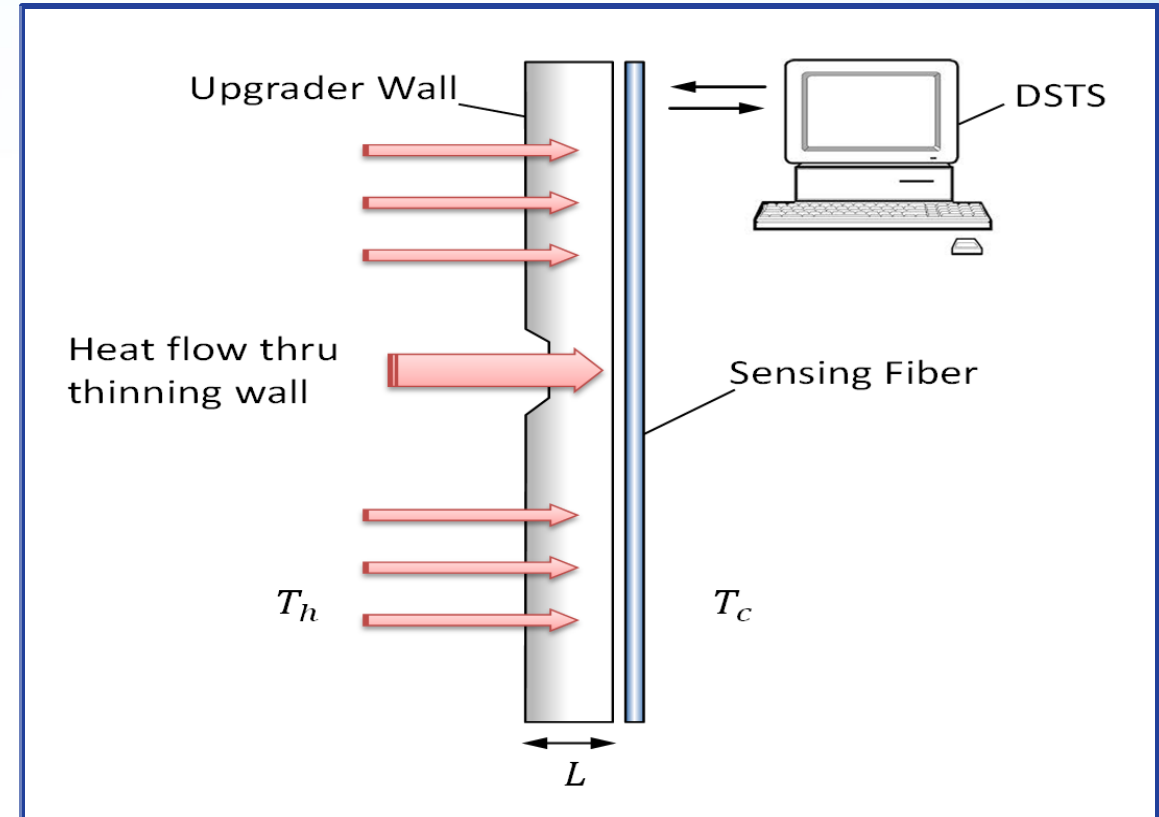



# Pipeline Buckling Detection

Pipeline buckling detection in TransCanada Pipeline Ltd, Calgary, and C-FER Technology, Edmonton

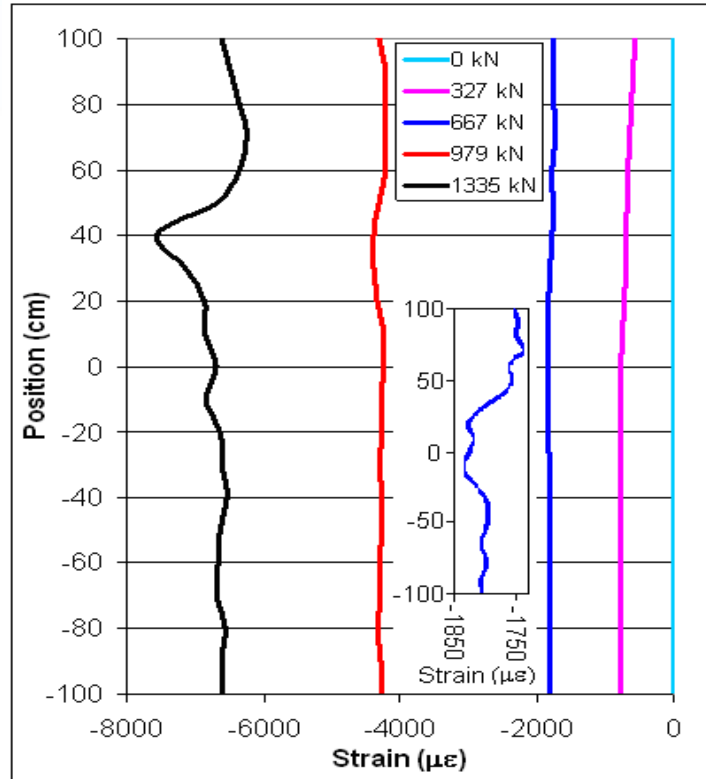


# Metal/Polyimide Coated Hermetic Fibers



## Coating Materials and Maximum Sustainable Temperatures

- UV-Cured Acrylate 100°C
- UV-Cured Dual Acrylate 150°C
- Polyimide 400°C
- Copper + Polyimide 400°C
- Aluminum 450°C
- Copper Alloy 600°C
- Gold 700°C +

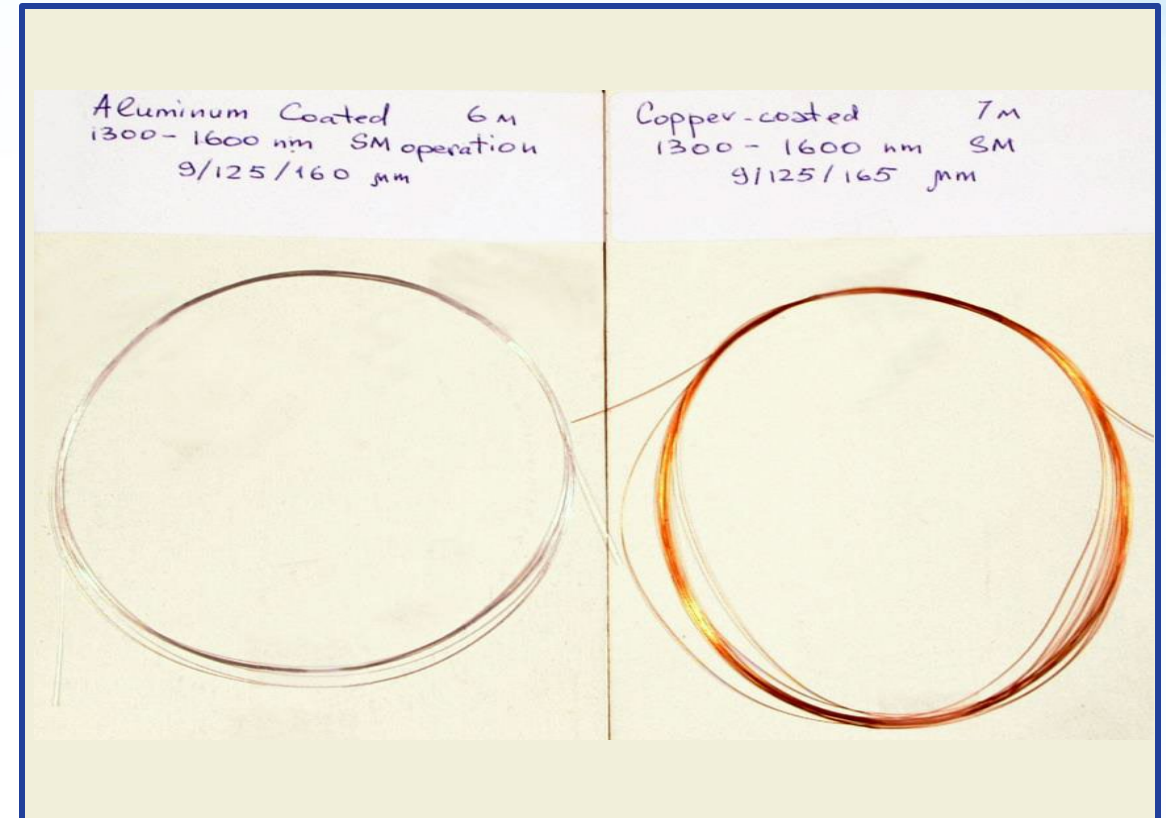

# Power Utility



- **OPGW Monitoring**
- **Power Cable (Submarine Cable) Monitoring**
- **Temperature Profile Monitoring of an Air-Cooled Gas Generator**





# OPGW Monitoring




- **Monitoring the Working Status of Opgw**
- **Abnormal Event Found and Located**
- **Event Caused by Broken Strand, Lightning, Frost Covering, Change of Strain, Etc..**



# OPGW Status Monitoring






- The OPGW is located from Smith Falls to Merivale-Ottawa, Ontario, Canada.
- The total fiber length was close to 140 km.
- The BOTDA located in Merivale-Ottawa made measurements as often as once every 60 minutes starting in June 2012 and continuing till July 2013.

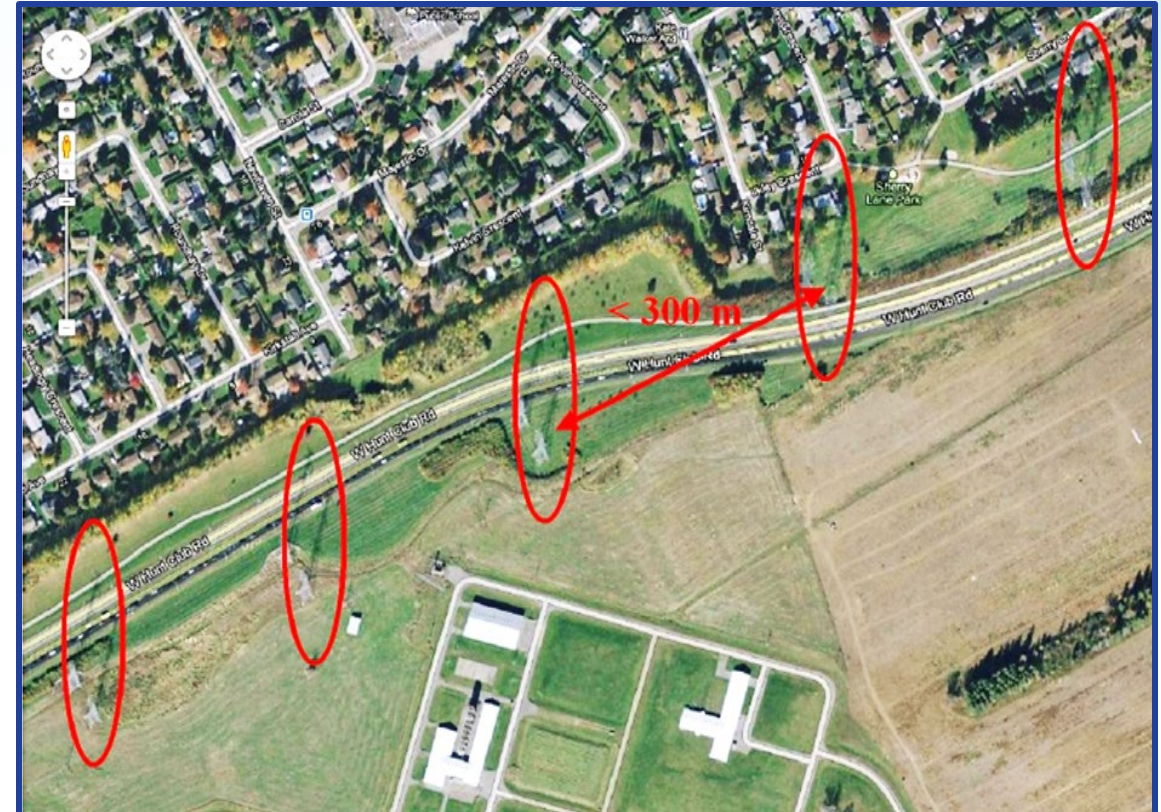



# OPGW Strain Monitoring

Power line/OPGW monitoring in Hydro-Quebec, Montreal

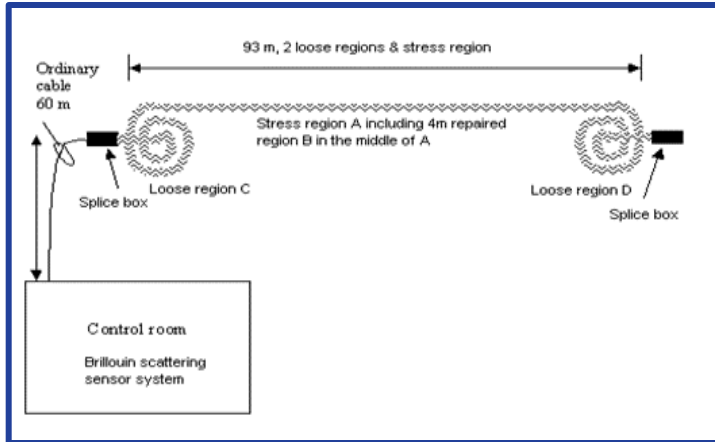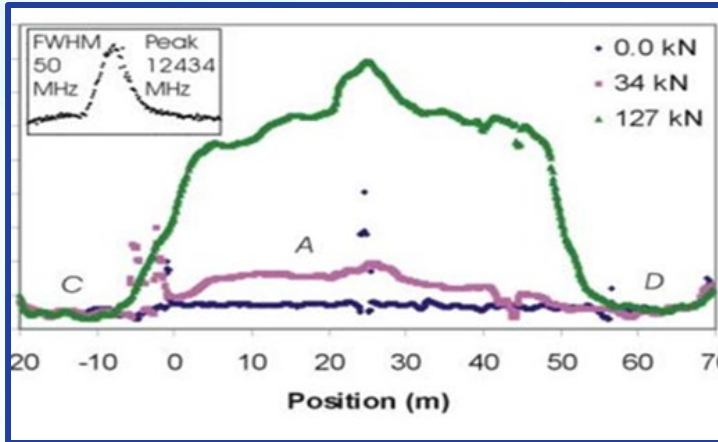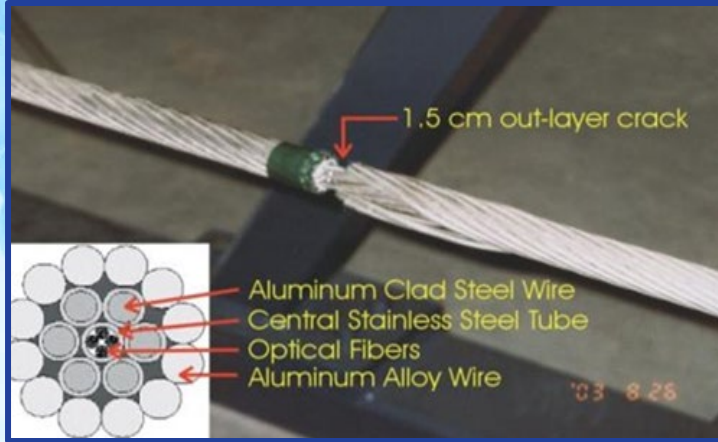





# High Voltage Underground Cable with Fiber





# Temperature Profile Monitoring of an Air-Cooled Gas Generator

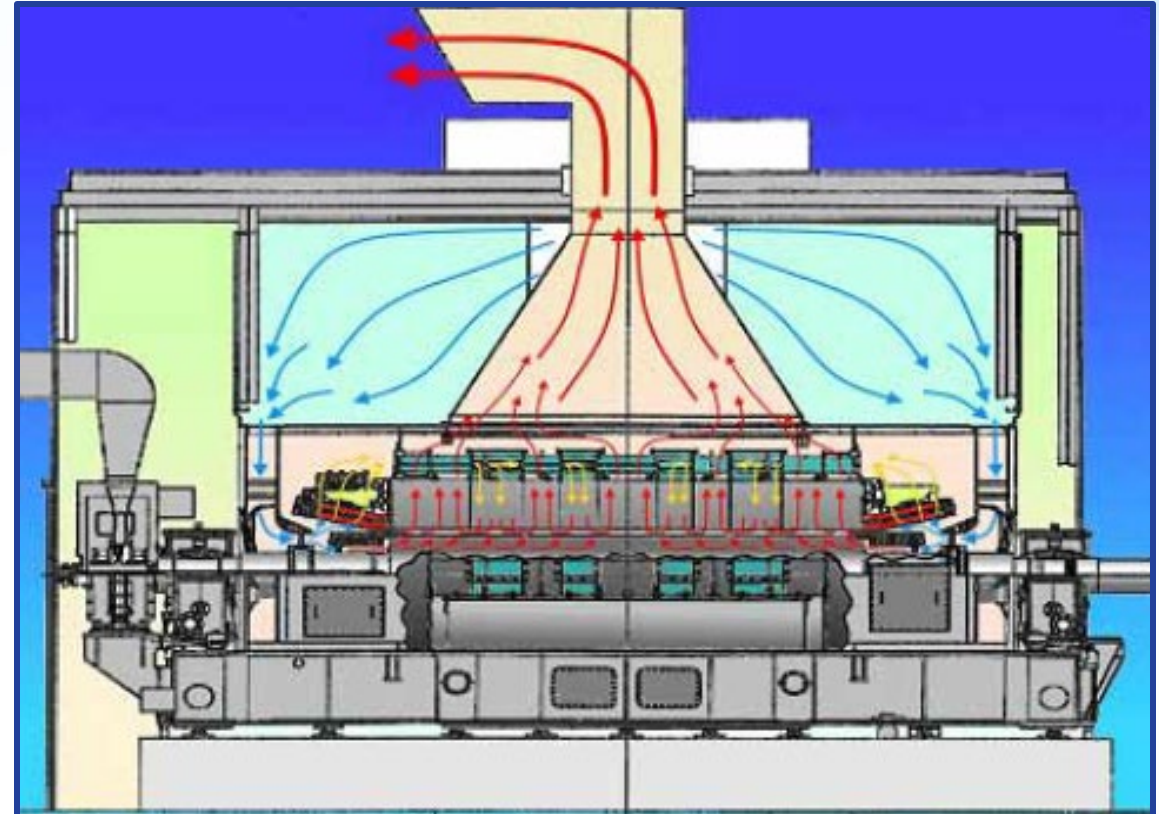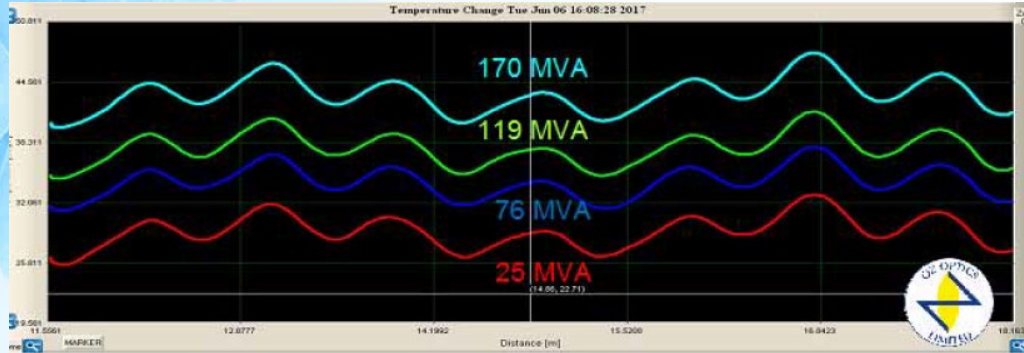




# Concrete Beam/Highway Monitoring



Concrete beam/Highway monitoring on HW40/University of Sherbrooke,  
Dr. Brahim Benmokrane



# ▶ GeoDetect With Embedded Fibers

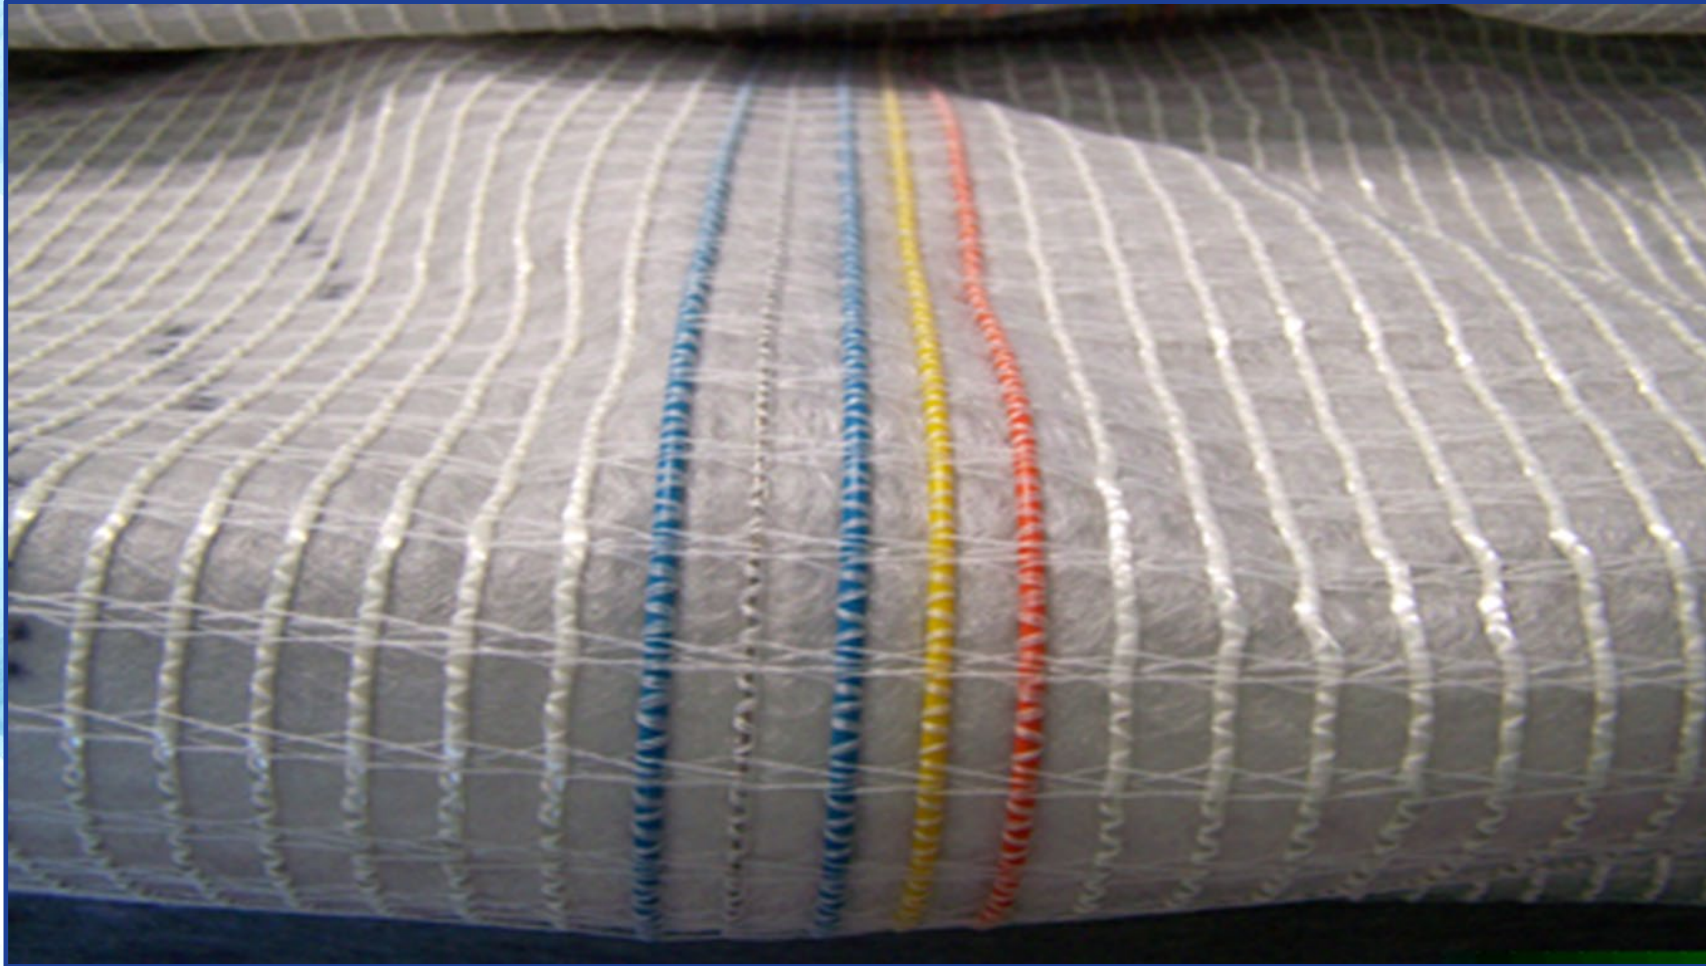

# ▶ Christchurch Northern Corridor (CNC) – Measuring settlement with fibre optics



Christchurch Northern Corridor (CNC) – Measuring settlement with fibre optics

 **NZ TRANSPORT AGENCY**  
WAKA KOTAHĪ

 **Christchurch City Council**

 **Christchurch Northern Corridor**

---

## CNC ALLIANCE PROJECT FEATURES

Project engineer Stephen Coleman talks about innovative fibre optics to measure settlement


[New Zealand Government](#)



# Crack Detection



Crack detection in University of California, Irvine, Dr. Maria Feng, 19th International Conference on Optical Fiber Sensors, Perth (Australia, 14-18 April 2008).



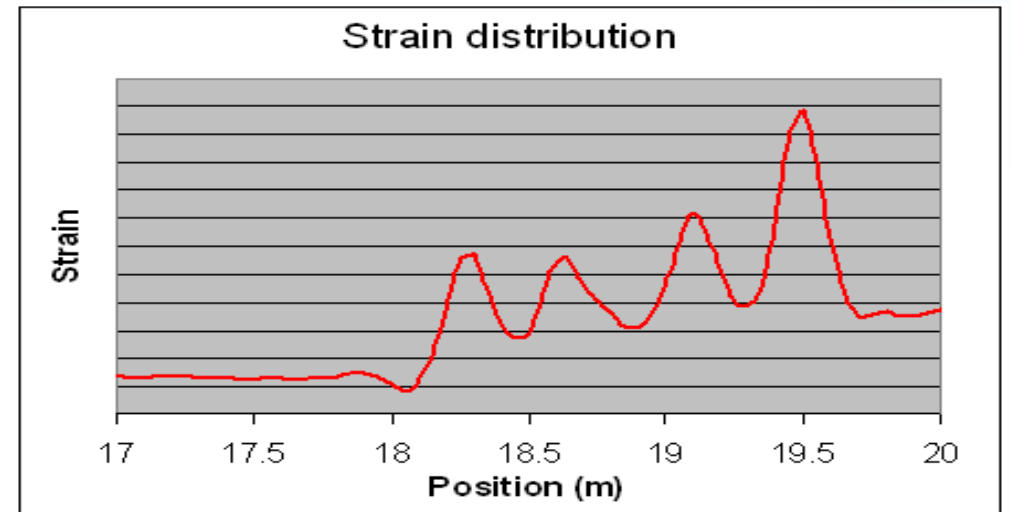




# Crack Detection



Crack detection in University of California, Irvine, Dr. Maria Feng, 19th International Conference on Optical Fiber Sensors, Perth (Australia, 14-18 April 2008).

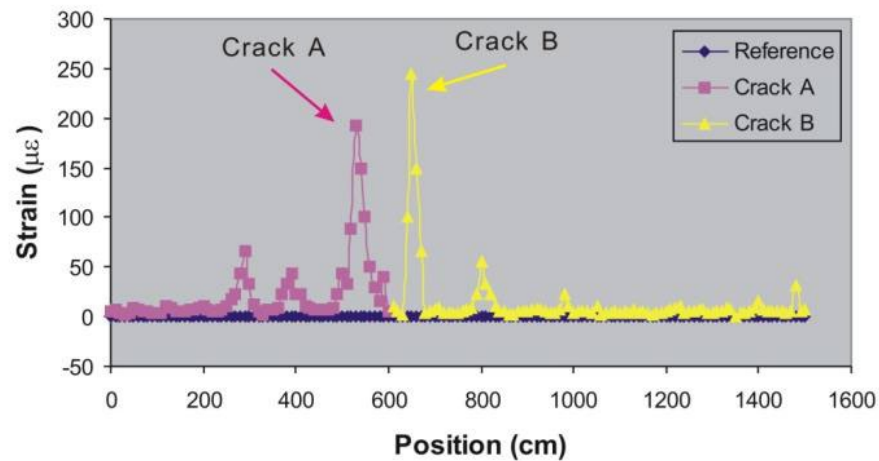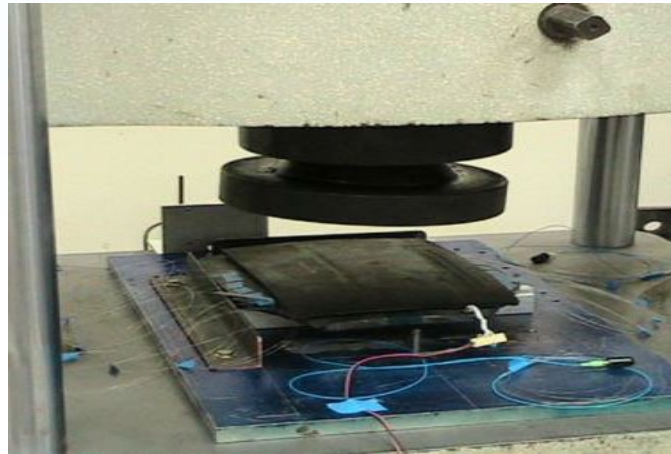
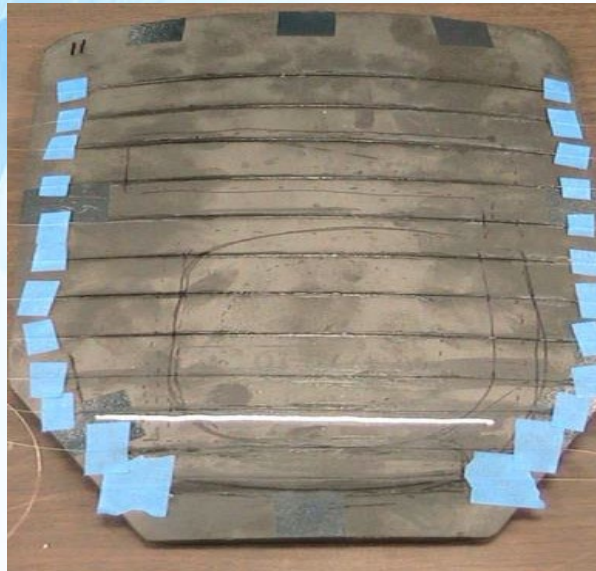




# Brillouin Sensor Monitoring of Telecom Fibers



- Detects minor events that are too small to be seen by OTDRs.
- Can replace OTDRs for monitoring fibers.
- Can be used to monitor new or existing fiber installations.
- Permits performance monitoring of fibers above or below ground.
- Avoids unnecessary replacement of old fibers, saving millions of dollars in installation costs.

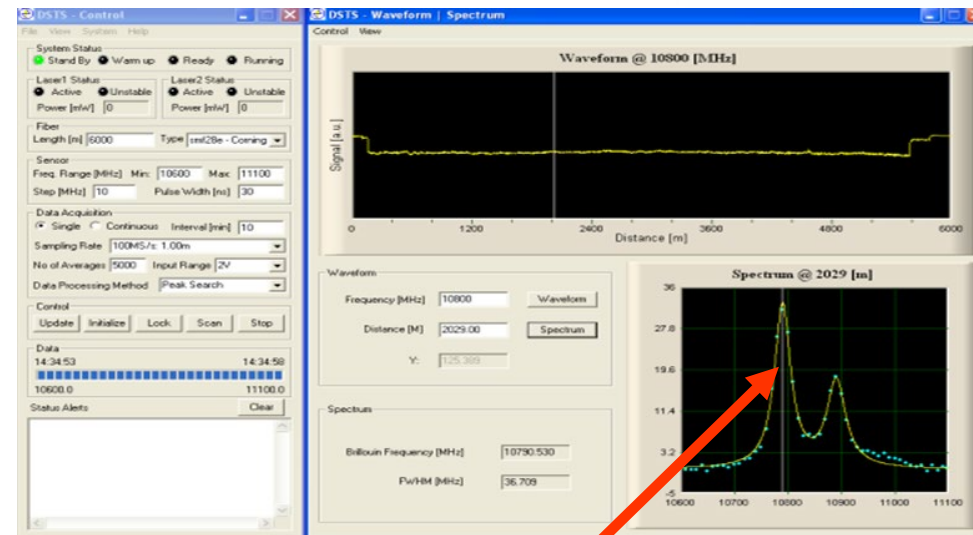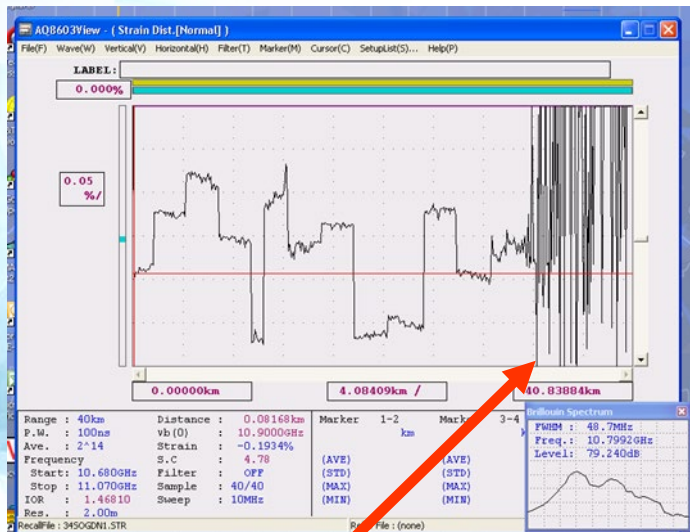

# The Cost of Catastrophic Failure

- **Example: Druzhba Pipeline July 2006**
- **Small 50 Cubic Meter Leak Results In:**
  - **Interruption of \$100M/Day Pipeline**
  - **Global Spike in Oil Prices**
  - **Report of Environmental Catastrophe**
  - **Months of Investigation and Ecological Monitoring**
- **Single Point of Failure in 3,000 km Pipeline**

# The Cost of Catastrophic Failure

- **Example 2: Nigerian Pipeline July 2006**
- **Accidental Leak**
- **180,000 Barrels / Day Shutdown**
- **$180,000 * \$74 = \$13\text{M}$  per Day**
- **10-day Shutdown = \$130M**
- **Brillouin Operation  $\ll$  \$1/m/year**
- **Single Production Shutdown Far Exceeds Lifetime Sensor Operating Costs.**

# Acknowledgements

- **University of California, Irvine, Dr. Maria Feng**
- **University of Ottawa, Dr. Xiaoyi Bao**
- **University of Sherbrooke, Dr. Brahim Benmokrane**
- **TransCanada Pipelines Limited (TCPL)**
- **C-FER Technologies**
- **Canmet Materials Technology Laboratory, NRCan**
- **Hydro-Quebec**
- **Southwest Research Institute®**
- **Tencate Geosynthetics**
- **NZ Transport Agency**
- **Christchurch Northern Corridor**
- **CNC Alliance Project**

# Thank You for Choosing OZ Optics

---

Please Contact Our Sales Department:

Tel: 613-831-0981 ext. 3370

Toll Free: 1-800-361-5415

Email: [sales@ozoptics.com](mailto:sales@ozoptics.com)

---

