



OZ Optics

shop.ozoptics.com
www.ozoptics.com

219 Westbrook Road
Ottawa, ON, Canada, K0A 1L0


Toll free: 1-800-361-5415
Telephone: 1-613-831-0981
Fax: 1-613-836-5089
sales@ozoptics.com

Fiber Optic Distributed Temperature Sensors (B-DTS)

Low-cost Brillouin BOTDA scattering version

For more information about our strain and temperature sensor system and related products, please visit www.ozoptics.com

Photo: 3U chassis and laptop computer shown.

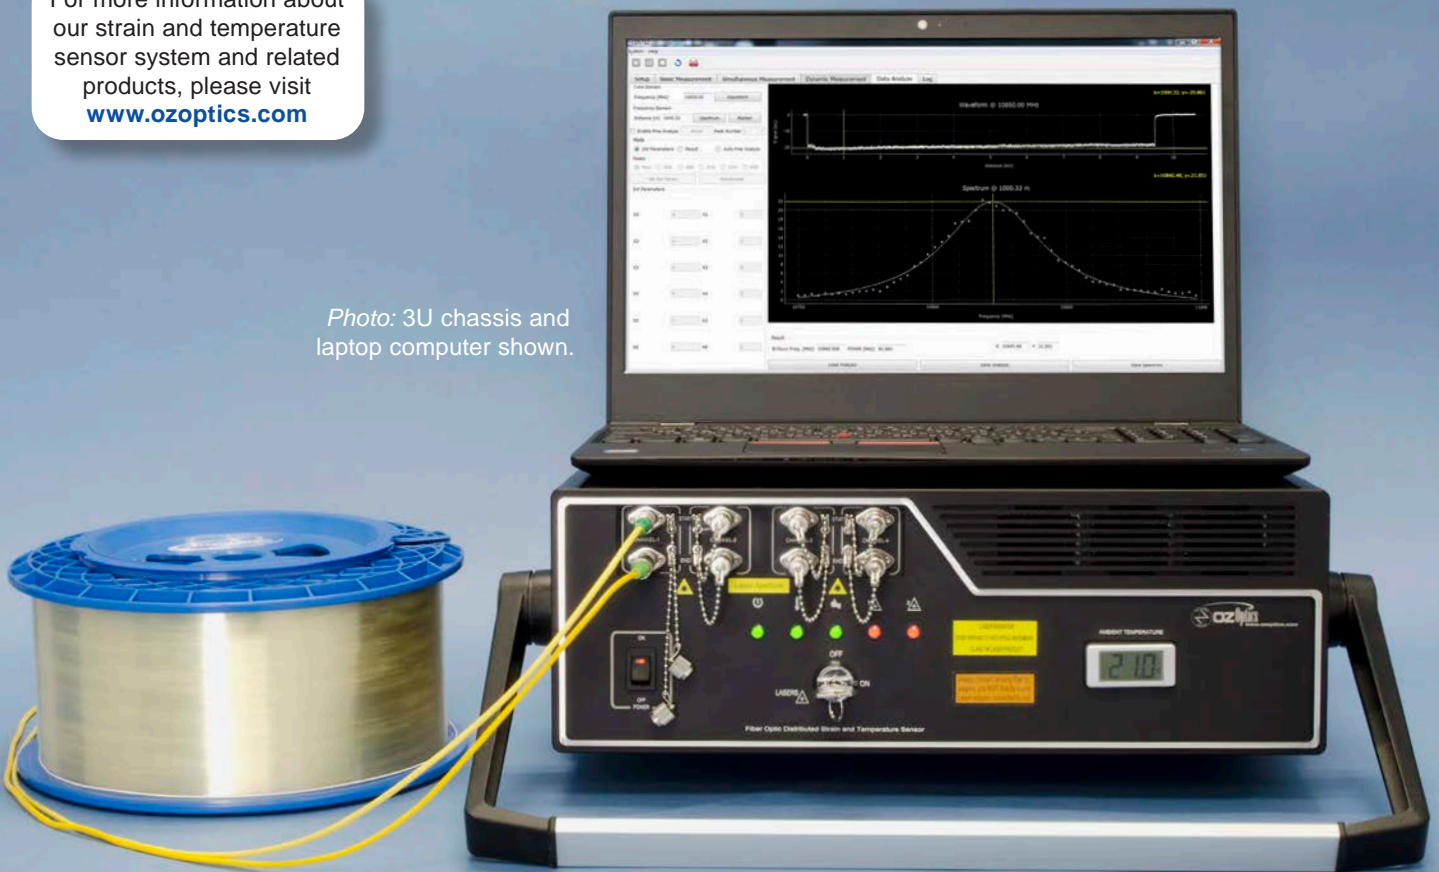

Features

- Fast measurement and dynamic measurement
- Uses standard telecom single mode fiber
- Good spatial resolution and long range
- Immune to attenuation changes

Performance at a glance

- 1 m spatial resolution for 20 km fiber length
- ± 0.3 °C temperature precision
- 100 km maximum sensing range

Description

OZ Optics' Foresight™ family of fiber optic Brillouin distributed temperature sensors (B-DTS) are sophisticated optical sensor systems employing stimulated Brillouin scattering. Distributed sensing provides a direct method of measuring changes in temperature along the entire length of an optical fiber. Maximum sensing length utilizing Brillouin analysis is 100 km, a significant improvement over Raman based distributed temperature sensors.

Oil and Gas applications



Oil and Gas Pipeline Monitoring

- Pipeline leakage monitoring
- Up to 100 km sensing range per channel
- High spatial resolution supports localized measurement with long sensing range
- Short acquisition / response time



Oil and Gas Well Monitoring

- Well integrity management
- Temperature, strain and pressure monitoring with proper sensing cable and installation
- Not sensitive to hydrogen which may change the attenuation of the fiber



Refinery Efficiency Sensing


- Improve the efficiency of the refinery per distributed temperature profile
- Reduce downtime while ensuring safety levels
- Uses low cost telecom single mode fiber cable

Utility and cable applications



Overhead Power Line Monitoring

- Lightning strikes, icing and broken wires can be detected
- Up to 100 km sensing range per channel
- No additional components required along power line route
- Easy deployment

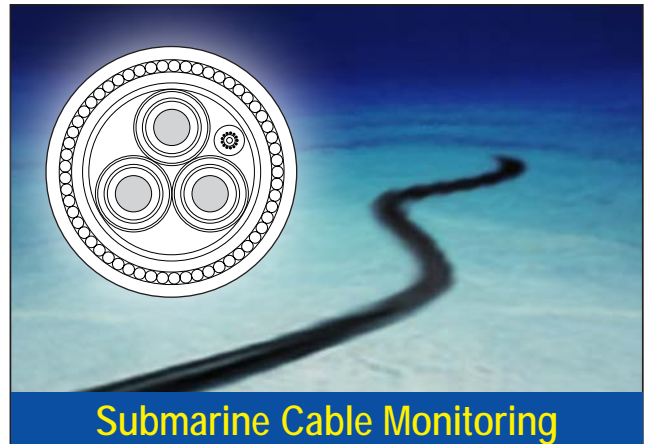

Submarine Cable Monitoring

- Ongoing quality / status monitoring throughout the life of the cable
- No additional components required along the route

Cryostat, and Fire applications



Cryostat Temperature Sensing

- Able to measure temperatures as low as 25 K
- May use low cost telecom single mode fiber
- Up to 100 km sensing range per channel
- High spatial resolution with good temperature resolution / precision



Building Fire Detection

- Fast, dynamic, and accurate temperature measurement
- Up to 100 km sensing range per channel
- May use low cost telecom single mode fiber cable

Specifications

Model		Foresight™ Series		
Performances	Number of Channels	2 to 25 ¹		
	Sensor Configuration	Loop fiber, single end configuration is optional		
	Sensing Range	60 km	100 km	
	Spatial Resolution	1 m to 6 m ²	1 m to 20 m	
	Spatial Step	as low as 5 cm		
	Temperature Range	-270 °C to +2100 °C (depending on cable material)		
	Temperature Resolution	0.005 °C ³		
	Temperature Accuracy (2σ)	± 0.3 °C (Whole sensing range for BOTDA)		
	Dynamic Measurement	Optional		
	Fast Measurement	Optional		
	Averaging	1 to 65,000 scans		
	Measured Variables	Temperature, Brillouin spectrum		
General	Communication & Connections	Ethernet port, USB		
	Output Signals	Software alarms via TCP/IP, SPST, SSR relays (optional)		
	Data Storage	Internal hard disc (128 GB or more)		
	Data Format	Database, text files, MS Excel, bitmap plot		
	Optical Connections	FC/APC ⁴		
	Laser Wavelength	1550 nm band		
	Operating Temperature	0 °C to 40 °C, <85% RH, Non-condensing		
	Power Supply	115 or 230 VAC; 50-60Hz; max 300W		
	Dimensions (L x W x H)	3U Chassis	390 mm x 344 mm x 133 mm (not including computer) ⁵	
	Weight	3U Chassis	<12 kg (not including computer)	
Features	Measurement Modes	Manual, remote or automatic unattended measurements		
	Data Analysis	Measurement analysis, multiple trace comparison with respect to selectable baseline, measurement trends, graphical zoom		
	Alarm & Warnings	Automatic alarm triggering, configurable alarm settings (heat, threshold, etc.)		
	Remote Operation	Remote control, configuration and maintenance via TCP/IP		
	Watch Dog	Long term operation 24/7 guaranteed by automatic recovery and continuous self diagnostics		

¹ 2 channels or 4 channels are provided within the sensor unit. Additional channels can be added by using an external optical switch.

² Better spatial resolution is optional.

³ This value is estimated/calculated from the uncertainty of laser beat frequency (5 kHz), and temperature and strain coefficients of fibers.

⁴ Adaptors and patch cords are available for mating with other types of optical connectors.

⁵ Dimensions do not include carrying handle. Air vents on sides of unit must not be obstructed.

Related Products

Fiber Optic Sensor Probes, Components, Termination Kits, and Training

OZ Optics offers a full spectrum of fiber optic sensor probes, components, termination kits and training. OZ Optics' standard fiber optic products have been used worldwide in high performance sensor and telecommunications applications since 1985. OZ Optics also offers specialty fiber optic sensor probes and custom cabling for high temperature applications and other hostile and corrosive environments. System integrators with experience in structural and pipeline monitoring will find that OZ Optics offers a complete suite of enabling products and services for installing and maintaining fiber optic systems. If you are planning a pipeline or structural monitoring project, please contact OZ Optics to learn more about our fiber optic solutions.

For more information about our strain and temperature sensor systems and related products, please visit www.ozoptics.com.

Ordering Information

Part Number Description: **BDTS-CT CO I-SR-MSR-AS-BOTDA-X-CH**

CT = Chassis Type of DSTS
opto-electronics box
3U = 3U chassis

CO = Computer Type
L = Laptop (requires 3U chassis)
X = Customer supplier computer

I = Internal Interface between DAQ and
computer
T = Thunderbolt (requires 3U chassis)
S = Standard

SR = Spatial Resolution (m)¹
1/10
1/50

CH = Number of channels
2CH = 2 built-in channels
4CH = 4 built-in channels

X = Connector Type
3A = FC/APC


AS = Acquisition Speed³
N = Normal
H = High Speed

MSR = Maximum Sensing Range (km)^{1,2}
60
100

For a field-ready unit, replace the chassis type, computer type, and computer interface with a single letter "F." Field ready units include a built-in computer, monitor, keyboard and mouse.

Notes:

- Each BDTS can be configured for short haul operation, long haul operation or both. The configuration must be specified at the time of purchase. The spatial resolution indicates the best resolution at the maximum sensing range. If the BDTS is configured for both short-haul and long-haul measurements then two numbers will be listed indicating the resolutions and maximum sensing range for each operating mode. For example, suppose the BDTS unit needs to achieve 1 meter resolution over a 10 km range for short-haul applications, and 50 meter resolution over a 100 km range for long-haul applications. The part number will specify the spatial resolution (SR) as 1/50, and maximum sensing range (MSR) as 100.
- Maximum sensing range is 60 km or 100 km for long haul operation.
- The acquisition speed is described as normal or high speed. N and H are used respectively. The high-speed version is typically at least a factor of two faster than the normal-speed version during the acquisition of data.

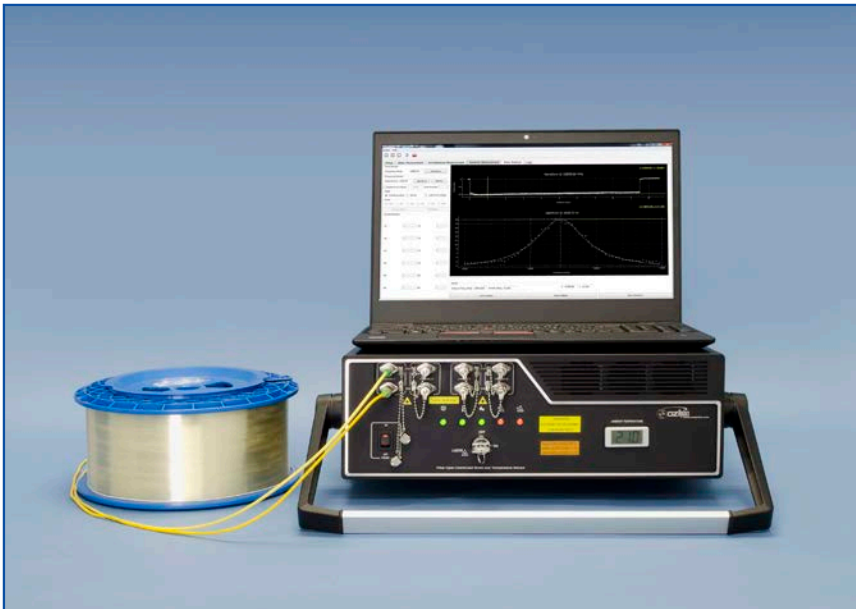

3U model with laptop computer

The 3U version of the BDTS comes with removable carrying handles. The user can easily replace the handles with tabs (sold separately) that will allow the unit to be installed in a standard 19-inch rack.

Optional Accessories



Fiber fusion splicer - FSP-100-S/M



Precision fiber cleaver - FSP-100-CLV

Optional Accessories

Bar Code	Part Number	Description
74023	DSTS-TRAVEL-CASE-3U	Plastic travel case for 2U or 3U DSTS unit, with extendable pull handle and wheels. Designed for checking on airplane. Approximate dimensions: 23.75 (H) x 22.5 (W) x 15 (D). {60.3 cm x 57.2 cm x 38.1 cm}.
65518	FIBER MICROSCOPE HANDHELD	Handheld Video Microscope kit for Fiber Optic Connector Inspection. The kit includes an LCD display with video probe. An AC power adapter with battery charger and a rechargeable battery pack is included. Several common adaptor types come with the unit, including an SC/FC PC female adaptor and an LC/PC female adaptor.
48980	CI-1100-A2-PT2-FS/APC/F	Tip for SC and FC APC type female (in receptacle) connector for CI-1100-A2 handheld microscope.
36939	HUXCLEANER-2.5	Receptacle fiber cleaner for FC, SC and ST types.
5336	Fiber-Connector-Cleaner-SA	Disposable Cletop reel type A optical fiber connector cleaner.
8122	SMJ-3A3A-1300/1550-9/125-3-1	1 meter long, 3 mm OD jacketed, 1300/1550 nm 9/125 μ m Corning SMF 28e fiber patchcord, terminated with angled FC/APC connectors on both ends.
11	PMPC-03	Flanged sleeve thru connector for polarization maintaining FC/PC connectors. Keyway width is 2.03/2.07 mm wide for 2.00 mm wide (Type R) key connectors.
19711	AA-200-11-9/125-3A3A	Universal connector with a male angle FC/APC connector at the input and a female angle FC/APC receptacle at the output end for SM 9/125 applications.
58975	DSTS-3U-19IN-RACK-MOUNT-KIT	Brackets with handles & hardware to convert 3U DSTS to 19" rack mountable version.
77982	FSP-100-S/M	Fiber fusion splicer for singlemode and multimode fiber, featuring fiber core alignment and automatic fiber identification (singlemode vs multimode) for optimum splice loss. Suitable for bare fibers, patch cords, drop cables etc. A fiber cleaver and fiber stripper is included with the unit as a kit.
77984	FSP-100-CLV	Precision fiber cleaver for fusion splicing, with automatic blade rotation for maximum lifetime.

Questionnaire

1. What is your application? Please describe briefly.
2. Are you looking for a BOTDA module (requires both ends of fiber to be connected to DSTS) or a BOTDR module (requires only one end of fiber to be connected to DSTS) or a COMBO unit with both BOTDA and BOTDR functions?
3. What are your resolution and precision requirements for temperature measurements?
Resolution: _____
Precision: _____
4. What are the highest and lowest temperatures you expect?
5. What are your resolution and precision requirements for strain measurements?
Resolution: _____
Precision: _____
6. What is the maximum strain to be measured?
7. What is the desired sensing range or fiber length in this application?
8. What spatial resolution do you desire?
9. Do you want to measure temperature, strain or both?
10. What is the desired data acquisition time?
11. Do you need fiber calibration / system design / project engineering service?
12. Where will the unit be housed?
13. Do you need a portable model with a laptop computer or a 19" rack-mounted model with a laptop computer?
14. Any additional information?

Please email sales@ozoptics.com for our recommendation about your requirements.