
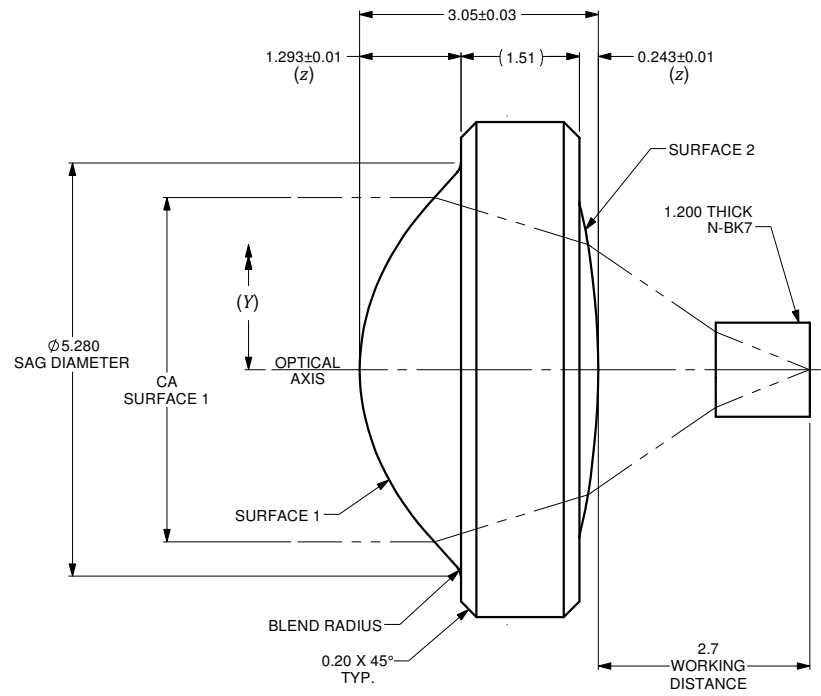


$$z = \frac{Y^2}{R \left( 1 + \sqrt{1 - (1+k) \frac{Y^2}{R^2}} \right)} + A_4 Y^4 + A_6 Y^6 + \dots + A_n Y^n$$

	SURFACE 1	SURFACE 2
SURFACE TYPE	ASPHERIC	ASPHERIC
CLEAR APERTURE (CA)	ø4.40mm	ø4.00mm
RADIUS OF CURVATURE	2.71628	-7.89261
<i>k</i>	-1.08784	-2.06753
<i>A<sub>4</sub></i>	3.19041E-003	7.04741E-003
<i>A<sub>6</sub></i>	1.08648E-004	-5.41654E-004
<i>A<sub>8</sub></i>	-2.13936E-005	-3.56018E-004
<i>A<sub>10</sub></i>	4.03385E-006	7.96281E-005
<i>A<sub>12</sub></i>	-8.35205E-007	-5.60057E-006
<i>A<sub>14</sub></i>	0	0

VARIABLES	
<i>z</i>	SURFACE PROFILE
<i>Y</i>	DISTANCE FROM OPTICAL AXIS
<i>R</i>	RADIUS OF CURVATURE
<i>k</i>	CONIC CONSTANT
<i>A<sub>4</sub></i>	4th ORDER ASPHERIC COEFFICIENT
<i>A<sub>6</sub></i>	6th ORDER ASPHERIC COEFFICIENT
<i>A<sub>n</sub></i>	nth ORDER ASPHERIC COEFFICIENT

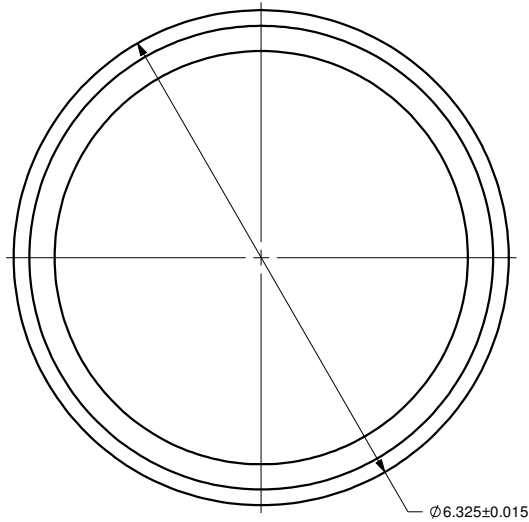

NUMERICAL APERTURE	0.56
EFFECTIVE FOCAL LENGTH	3.9mm

**NOTES :**

- MATERIAL: D-ZK3
- WAVEFRONT ABERRATION (RMS): <0.08λ @ 632.8nm
- AR COATING: 375-650 nm  
REFLECTIVITY R<sub>avg</sub> ≤0.50%

ALL DIMENSIONS ARE IN MILLIMETERS		A	N/A	ORIGINAL ISSUE	C.M.	17-SEP-2019	
DRAWN BY: P. SUMMERS	DATE: 9/17/2019	REV.	ECR REF#	DESCRIPTION	ENG. BY	DATE	
CHECKED BY:	DATE:	UNLESS NOTED OTHERWISE, DIMENSIONS ARE IN MILLIMETERS. INCHES ARE IN SQUARE BRACKETS, AND TOLERANCES APPLY AS SHOWN BELOW.				PART BARCODE #: 529	
M/S CHECKED BY:	DATE:	INCHES				219 WESTBROOK ROAD OTTAWA, ONTARIO CANADA K6A 1L0	
AP/VD BY:	DATE:	MILLIMETERS				www.ozoptics.com	
PROJECTION:		DESC: ASPHERIC LENS f=3.9mm, OD=6.33mm. AR COATED FOR 375-650nm				PART NO. AS-F3.9-D6.33-375/650	
CONFIDENTIAL THIS PRINT IS THE EXCLUSIVE PROPERTY OF OZ OPTICS AND MUST BE RETURNED UPON REQUEST. UNAUTHORIZED USE, MANUFACTURE OR REPRODUCTION IN WHOLE OR IN PART IS PROHIBITED.		SURFACE FINISH				REV A	
		MILLED	PROFILED	SIZE: B	DWG.# 4000-0213	SHEET 1 OF 1	SCALE: 16:1
		125μ	63μ				